




STATE OF NEW YORK
OFFICE OF GENERAL SERVICES
DESIGN AND CONSTRUCTION GROUP
THE GOVERNOR NELSON A. ROCKEFELLER
EMPIRE STATE PLAZA
ALBANY, NY 12242



ADDENDUM NO. 2 TO PROJECT NO. 44304

**CONSTRUCTION WORK
REPLACE WINDOW'S
HOUSING UNITS 1, 2, 4 and 9
MIDSTATE CORRECTIONAL FACILITY
P.O. BOX 216, RIVER ROAD
MARCY, NY 12589-0286**

February 10, 2015

NOTE: This Addendum forms a part of the Contract Documents. Insert it in the Project Manual.
Acknowledge receipt of this Addendum in the space provided on the Bid Form.

SPECIFICATIONS

1. Section 028303.

Add to paragraph 3.11: "C. Dispose of steel coated with lead by recycling to the greatest extent possible to a facility that is certified to accept this type of material.

2. Section 028304.

Add to paragraph 3.09: "C. Dispose of steel coated with lead by recycling to the greatest extent possible to a facility that is certified to accept this type of material."

3. Section 111904.
 - a. 2.01. A. 1

4. Section 111904.
 - b. 2.01. A. 1
 1. In first sentence, Change '...shall be tubular...' to '...shall be angular...'


DRAWINGS

1. Drawing No. A-202
 - a. At window elevation types 9 and 10, change upper sash Type 'S-10' Glass to read Type 'M' Glass.

2. Drawing No. A-203
 - a. Change Security Screen Note 3 from '...77 existing...' to '...122 existing...'
3. Drawing No. A-501
 - a. On detail 3/A501 at sill frame condition, ADD note 'Threaded stud bolt welded to 'U' channel. Stud bolt to be 1/2" dia., embed 1" into non-shrink epoxy grout. Space stud bolt @ 1'-0" O.C. max.'
 - b. At detail 7 & 4/A501, CHANGE 'galv. epoxy anchor' from '1/2" O.D.' to '3/8" O.D
 - c. At details 3,4,5,7/A501 at dashed blocking areas shown, ADD 'Pressure treated wood blocking, typical'
4. Drawing No. A-502
 - a. At sill frame condition, ADD note 'Threaded stud bolt welded to 'U' channel. Stud bolt to be 1/2" dia., embed 1" into non-shrink epoxy grout. Space stud bolt @ 1'-0" O.C. max.'
 - b. At detail 5&6/A502, CHANGE 'galv. epoxy anchor' from '1/2" O.D.' to '3/8" O.D
 - c. At details 1,4,5,6/A502 at dashed blocking areas shown, ADD 'Pressure treated wood blocking, typical'.
 - d. Replace detail 1/A502 with the attached AD2-01
5. Drawing No. A-504
 - a. Omit details 1, 2, and 3.
6. Drawing No. A-506
 - a. Change detail 7/A506 wording from ' stainless steel hinge...' to ' electro-plated hinge...'

END OF ADDENDUM

Margaret F. Larkin
Executive Director
Design and Construction

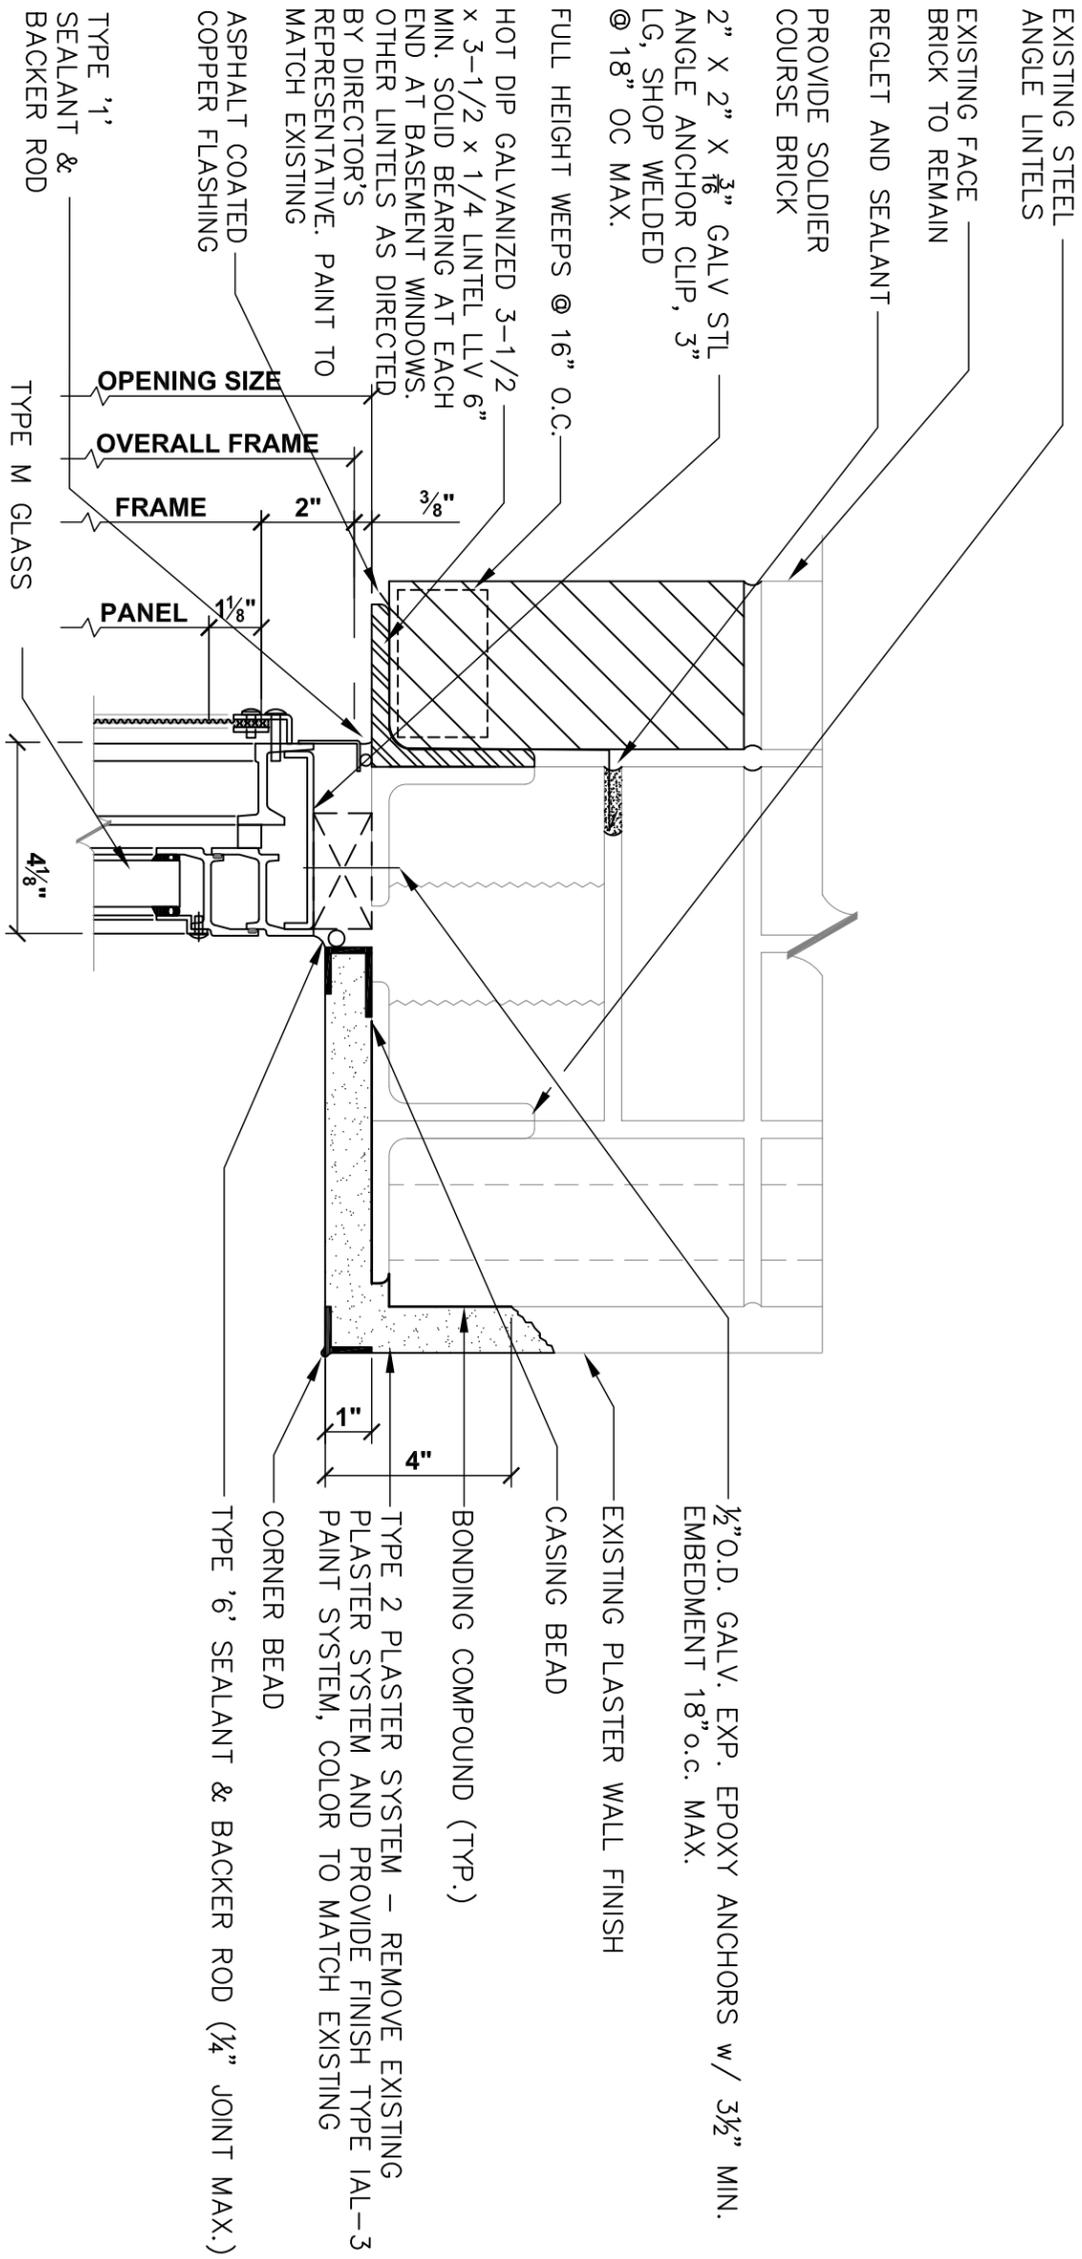

1 DETAIL @ FIXED HEAD

A-502

SCALE: 3" = 1'-0"

**TYPE 2 DETENTION WINDOW
3RD FLOOR BUILDING 9**



REPLACE WINDOWS:
HOUSING UNITS 1, 2, 4 AND 9
MID-STATE CORRECTIONAL FACILITY

SHEET TITLE:

CONTRACT: CONSTRUCTION

PROJECT NO: 44304

DATE: 2/10/15

DESIGN BY: DFK

DRAWN BY: DFK

WARNING: THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.

DWG NO:

AD2-01