



DESIGN AND CONSTRUCTION GROUP
THE GOVERNOR NELSON A. ROCKEFELLER
EMPIRE STATE PLAZA
ALBANY, NY 12242

ADDENDUM NO. 6 TO PROJECT NO. 44604

**CONSTRUCTION WORK
EXCAVATE CONTAMIANATED SOIL
NYS POLICE TUPPER LAKE
1960 ROUTE 30
TUPPER LAKE, NY**

April 25, 2016

NOTE: This Addendum forms a part of the Contract Documents. Insert it in the Project Manual. Acknowledge receipt of this Addendum in the space provided on the Bid Form.

CONTRACTING REQUIREMENTS

1. DOCUMENT 007213 GENERAL CONDITIONS: Change Article 19.1.1 to read:

“19.1.1 The endorsement shall name The People of the State of New York, its officers, agents, employees, the assigned construction manager, the Office of General Services and/or their representatives and contractors under their employ, the New York State Police and the Nelson and Kimberly Landry, PO Box 932, 1960 State Route 30, Tupper Lake, NY as additional insureds there under. This additional insured shall be primary and non-contributory. (General Liability Additional Insured Endorsement shall be on Insurance Service Office’s (ISO) form number CG 20 10 11 85 and a copy of which shall be furnished along with the Certificate of Insurance.) The Contracting Officer may modify the provisions of this Article when deemed in the best interest of the State by order on contract or field order.”

SPECIFICATIONS

2. SPECIFICATION SECTION 028213 ASBESTOS ABATEMENT: Discard the Section bound in the project and replace with the accompanying Section (pages 028213-1 thru 028213-8).

APPENDIX

3. ADD Drawings H-100, H-101 and H-102 dated 4/14/16 to the Appendix.

END OF ADDENDUM

Margaret F. Larkin
Executive Director
Design and Construction

SECTION 028213

ASBESTOS ABATEMENT

1.01 SUMMARY

- A. This Section specifies the procedures for removal of existing asbestos-containing materials (ACM) in a structure to be demolished and disposal of removed materials. The demolition of the structure will be by the Construction Work Contract. The results of the testing for ACM are listed in Documents 003126.
 - 1. The report was compiled by an ELAP certified laboratory.
 - 2. In order to determine asbestos content, samples were analyzed by polarized light microscopy (PLM) and/or transmission electron microscopy (TEM).
 - 3. The report is intended for State Design and estimate purposes only, and is included to provide bidders with the same information available to the State.
 - 4. The Bulk Samples are representative of like materials in the Work area. All ACM may not have been sampled.
- B. Determine type of Asbestos Abatement Project: Based on the results of the Asbestos Survey Report located in the Appendices, the project type falls under the following criteria:
 - 1. Large Asbestos Abatement Project: An asbestos project involving the removal, disturbance, repair or handling of more than 160 square feet or 260 linear feet of ACM.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Existing Hazardous Material Information: Document 003126.
- B. Summary of the Work: Section 011000.
- C. Construction Facilities and Temporary Controls: Section 015000.
- D. Removals, Cutting, and Patching: Section 017329.

1.03 REFERENCES

- A. New York State Department of Environmental Conservation (DEC) 6NYCRR:
 - 1. Part 360 Solid Waste Management Facilities.
 - 2. Part 364 Waste Transporter Permits.
 - 3. Part 370 Hazardous Waste Management System-General.
 - 4. Part 371 Identification and Listing of Hazardous Wastes.
 - 5. Part 372 Hazardous Waste Manifest System and Related Standards for Generators, Transporters and Facilities.
 - 6. Part 373 Hazardous Waste Management Facilities.
- B. Occupational Safety and Health Administration (OSHA): Asbestos Regulations (29 CFR Part 1926.1101).

- C. U.S. Environmental Protection Agency (USEPA):
 - 1. National Emission Standards for Hazardous Air Pollutants; Asbestos NESHAP Revision; Final Rule.
 - 2. Asbestos Emergency Response Act (AHERA) (40 CFR Part 763, Subpart E).
- D. New York State Department of Labor (DOL): Industrial Code Rule 56.

1.04 DEFINITIONS

- A. Authorized Personnel: Facility or the Director's Representative, and all other personnel who are authorized officials of any regulating agency, be it State, Local, Federal or Private entity who possess legal authority for enforcement or inspection of the work.
- B. Clearance Criteria: Shall be determined and established by a Certified Asbestos Project Monitor with an independent testing lab employed by the Director's Representative, conforming to all standards set forth by all authorities having jurisdiction, mentioned in the references, and issue the certification of cleaning.
- C. Site Specific Variance: Relief in accordance with section 30 of the Labor Law from specific sections of Industrial Code Rule 56 for a specific project.
- D. Phase I & II: Asbestos Project phases as defined and subcategorized in ICR 56-2.

1.05 ABBREVIATIONS

- A. ASTM: American Society for Testing and Materials
1916 Race Street
Philadelphia, PA 19103
- B. CFR: Code of Federal Regulations
Government Printing Office
Washington, DC 20402
- C. DOL: New York State Department of Labor
Harriman State Office Building Campus
Albany, NY 12240
- D. NIOSH: National Institute for Occupational Safety and Health
Building J.N.E. Room 3007
Atlanta, GA 30333
- E. OSHA: Occupational Safety and Health Administration
200 Constitution Avenue
Washington, DC 20210
- F. USEPA: United States Environmental Protection Agency
401 M Street SW
Washington, DC 20460

1.06 ASBESTOS SITE SPECIFIC VARIANCE

- A. If a site specific variance is sought, the application must be submitted by the contractor's NYS DOL Certified Asbestos Project Designer with 14 days after the Contract Agreement is approved by the Comptroller. Forward the required forms to the Department of Labor for their action.

1.07 SUBMITTALS

- A. Asbestos Site Specific Variance Submittals; if a site specific variance is sought submit the following:
 - 1. One copy of the completed DOSH-751 and DOSH-465 forms.
 - 2. One copy of the New York State Department of Labor site specific variance decision.

- B. Quality Control Submittals:
 - 1. Notification Compliance Data: Within 2 days after notification is sent to the regulatory agencies submit one copy of each notice sent to each regulatory agency (USEPA and DOL).
 - 2. Asbestos Removal Company Data: Name and address of proposed asbestos removal company and abatement contractor license issued by DOL.
 - 3. Asbestos Worker Certification Data: Name and address of proposed asbestos abatement workers and licenses issued by DOL.
 - 4. Work Plan: For information only, submit one copy of the work plan required under Quality Assurance Article.
 - 5. Waste Transporter Permit: One copy of transporter's current waste transporter permit from NYS DEC (NYS Part 364 Permit).
 - 6. Landfill: Landfill to be used for ACM disposal shall be licensed to receive asbestos waste by NYS DEC (NYS Part 360 Permit) and by USEPA. Out of state landfills shall provide licenses from local agencies having jurisdiction.
 - 7. Negative Air Pressure Equipment: Copy of manufacturer's and performance data of all units and HEPA filters used.

- C. Asbestos Work Closeout Submittals:
 - 1. Waste Shipment Records and Disposal Site Receipts: Copy of waste shipment record and disposal site receipt showing that the ACM has been properly disposed.
 - a. Waste shipment record and disposal site receipt must be received within 35 days of the ACM waste leaving the Site. If receipts are not received within the specified time period, the Director's Representative will notify USEPA in writing within 45 days of the ACM waste leaving the Site.

- D. Contract Closeout Submittals:
 - 1. Daily Log: Submit copy of Project Monitor's daily air sample log and a copy of Asbestos Abatement Contractor's Daily project log.
 - 2. Air Monitoring Data: Submit copy of air test results and chain of custody.

1.08 QUALITY ASSURANCE

- A. Regulatory Requirements: Comply with the referenced standards.
- B. Pre-Work Conference: Before the Work of this Section is scheduled to commence, a conference will be held by the Director's Representative at the Site for the purpose of reviewing the Contract Documents, discussing requirements for the Work, and reviewing the Work procedures.
 - 1. The conference shall be attended by the Contractor, the asbestos removal subcontractor, and the testing laboratory employed by the Director.
- C. Work Plan: At the conclusion of the pre-work conference, before the physical abatement Work begins, prepare a detailed work plan.
 - 1. The work plan shall include, but not be limited to, work procedures, types of equipment, details of equipment used, decontamination unit locations, crew size, and emergency procedures for fire and medical emergencies and for failure of containment barriers.
 - 2. If a site specific variance is sought, do not finalize the work plan until the Department of Labor decision is received.

1.09 PROJECT CONDITIONS

- A. In addition to the postings required by law, post at the entrance to the abatement area the following documents:
 - 1. Copy of the printed Work plan.
 - 2. Copy of Industrial Code Rule 56.
- B. Shut-down of Air Handling System: Complete the Work of this Section within the time limitation allowed for shut-down of the air handling system serving the work area.
 - 1. The air handling system will not be restarted until approval of the air monitoring tests following the last cleaning.
 - 2. If total shut down of the system is not acceptable, follow all regulations for local isolation and provision for temporary HVAC as per DOL regulations.
- C. Maintain electric services to those portions of the building and remaining facility not a part of the asbestos abatement work area at all times. Follow all regulations for electric power shut down exemptions as per DOL regulations.
- D. Do not obstruct any aisle or passageway so as to reduce its required width as an exit.

1.10 HEALTH AND SAFETY

- A. Where in the performance of the work, workers, supervisory personnel or sub-contractors may encounter, disturb, or otherwise function in the immediate vicinity of contaminated items and materials, all personnel shall take appropriate continuous measures as necessary to protect all ancillary building occupants from the potential ACM exposure.

1. Such measures shall include the procedures and methods described herein and shall be in compliance with all applicable regulations of Federal, State and Local agencies.

1.11 FIRE PROTECTION, EMERGENCY EGRESS AND SECURITY

- A. Establish emergency and fire exits from the work area containment. Provide first aid kits and two full sets of protective clothing and respirators for use by qualified emergency personnel outside of the work area.
- B. Provide a logbook throughout the entire term of the project. All persons who enter the regulated abatement work area or enclosure shall sign the logbook. Document any intrusion or incident in the log book.

1.12 PERSONAL PROTECTIVE CLOTHING AND EQUIPMENT

- A. Workers must wear personal protective equipment for all projects as per OSHA and DOL regulations. Provide respiratory protection in accordance with OSHA regulation 1910.134 and ANSI Z88.2.
- B. Workers must be trained as per OSHA and DOL requirements, have medical clearance and must have recently received pulmonary function test (PFT) and respirator fit tested by a trained professional.
 1. A personal air sampling program shall be in place as required by OSHA.
 2. The use of respirators must also follow a complete respiratory protection program as specified by OSHA.

PART 2 PRODUCTS

2.01 DISPOSAL BAGS

- A. Type: Minimum 6 mil thick, black, and preprinted with a Caution Label.

2.02 EQUIPMENT

- A. Temporary lighting, heating, hot water heating units, ground fault interrupters, and all other equipment on site shall be UL listed.
- B. All electrical equipment shall be in compliance with the National Electric Code, Article 305 - Temporary Wiring.

2.03 GLOVE BAGS

- A. Type: Minimum 6 mil thick, clear, fire retardant polyethylene. Select glove bag sizes appropriate for the size and location of the project.

2.04 NEGATIVE AIR PRESSURE UNITS

- A. Type: Local exhaust system, capable of maintaining negative air pressure within the containment, and provides for HEPA filtration of efficiency not less than

99.97 percent with 0.3 micron particles. Equip the unit with filter alarms lights and operation time meter.

2.05 PLASTIC SHEETS

- A. Type: Minimum 6 mil thick, clear, fire retardant polyethylene.

2.06 RESPIRATORS

- A. Type: As approved by the Mine Safety and Health Administration (MSHA), Department of Labor, or the National Institute for Occupational Safety and Health (NIOSH), Department of Health and Human Services.

2.07 VACUUM CLEANERS

- A. Type: Vacuums equipped with HEPA filters.

PART 3 EXECUTION

3.01 ASBESTOS-CONTAINING MATERIAL HANDLING AND REMOVAL PROCEDURES

- A. Comply with the standards referenced in Part 1 of this Section.

3.02 CLEAN UP PROCEDURES

- A. Comply with the standards referenced in Part 1 of this Section.

3.03 PROJECT AIR SAMPLING, MONITORING AND ANALYSIS

- A. Air Sampling and Analysis: The Director will employ the services of an independent testing laboratory to perform air sample monitoring. The laboratory shall use the methods described in standards referenced in Part 1 of this Section.
 - 1. The equipment, duration, flow rate, calibration of equipment, number and location of samples are as per ICR 56-4.
 - 2. Air sampling technician shall be on site to observe and maintain air sampling equipment for the duration of the air sampling collection.
 - 3. Period of time permitted between completion of air sample collection and receipt of results on the project site shall be equal or less than 48 hours.
- B. If air samples collected outside the regulated work area indicate airborne fiber concentrations at or above 0.01 fibers per cubic centimeter, or the established background level, which ever is greater, work shall stop immediately for inspection of barriers and negative air ventilation systems. Clean up surfaces outside the regulated work area using HEPA filter equipped vacuums and wet cleaning methods. Work methods shall be altered to reduce fiber concentrations to acceptable levels.

- C. Elevated air sample results, if any, along with background and all other air sample results collected during Phase IIA through Phase IIC shall be submitted to the Commissioner of appropriate Asbestos Control Bureau within the same business day of receipt of results.

3.04 FINAL CLEANING AND CLEARANCE PROCEDURES

- A. Negative Pressure Ventilation: Negative air pressure machines if used, shall remain in continuous operation during the entire length of the project.
- B. Cleaning and Visual Inspection: After first, second, third cleaning and required waiting/settling and drying periods, perform a final visual inspection.
 - 1. Final clearance air sampling shall commence after the waiting/settling and drying time as per ICR 56 has elapsed.
- C. Project Monitor Visual Inspection: The Director will employ the services of a DOL certified asbestos project monitor employed by an independent testing laboratory to perform visual inspection as required by ICR 56.
- D. Final Clearance Air Sampling: The Director will employ the services of an independent testing laboratory to perform final air sampling.
 - 1. The laboratory shall use the methods described in standards referenced in Part 1 of this Section.
 - 2. The equipment, duration, flow rate, calibration of equipment, number and location of samples are as per ICR 56-4.
 - 3. If initial Post-Abatement (Clearance Air) Monitoring results do not comply with the standards referenced in Part 1 of this Section the Contractor shall either re-clean or order a full set of TEM analysis.
 - a. Results of the TEM analysis will be conclusive, and if the results do not comply with the standards referenced in Part 1 of this Section, the Contractor shall re-clean and additional full set of air samples will be collected and analyzed until the standards are met.
 - b. All satisfactory PCM clearance air sample results along with background air sample results, if they are greater than or equal to 0.01 fibers per cubic centimeter, shall be submitted to the Commissioner of appropriate Asbestos Control Bureau within two business days of receipt of satisfactory clearance air results.
 - c. All satisfactory TEM results of previously unsatisfactory PCM clearance air sample results, along with the unsatisfactory PCM results shall be submitted to the Commissioner of appropriate Asbestos Control Bureau within two business days of receipt of satisfactory clearance air results.
 - 4. Prior to removal of isolation barriers the Director's Representative at the site will receive an affidavit from the air monitoring laboratory certifying the final air samples comply with the standards referenced in Part 1 of this Section.
- E. Dismantling of Regulated Abatement Work Area:
 - 1. Remove all tools and equipment after proper decontamination as per Part 1 of this section.

2. Dismantle and remove each tent enclosure and air lock and any barriers only after final clearance air monitoring has been performed and satisfactory results obtained.
3. All remaining polyethylene, duct tape, expandable foam and other barrier materials shall be bagged, wrapped, containerized and labeled as asbestos waste.
4. Remove all temporary hard walled barriers from site.
5. Dismantle any remote decontamination units and plastic sheeting shall be disposed as asbestos waste.
6. Remove all waste generated to the holding area, lockable trailer or dumpster.
7. Contractor's Supervisor shall certify in writing to the Director that abatement work is complete and no debris/residue remains.

3.05 DISPOSAL OF ASBESTOS-CONTAINING MATERIAL AND RELATED DEBRIS

- A. Remove all waste generated as part of the asbestos project from the project site within ten calendar days from the site after completion of Phase IIC of the project or within one day of the waste disposal container/trailer becomes full, whichever occurs first.
- B. Transport and dispose of all the asbestos-containing waste, related debris, and waste water to the approved disposal site.
- C. All generated waste removed from the site must be documented, accounted for and disposed of in compliance with the requirements of USEPA NESHAP.
- D. Comply also with the standards referenced in Part 1 of this Section.

3.06 RESTORATION

- A. Remove temporary decontamination facilities and restore area designated for these facilities to its original condition or better.
- B. Where existing work is damaged or contaminated, restore work to its original condition or better.

END OF SECTION

The changes to the insurance language proposed are highlighted below.....

ARTICLE 19 - INSURANCE - BUILDER'S RISK, LIABILITY AND WORKERS' COMPENSATION

19.1 Before commencing the Work and until the established Physical Completion date, all insurance required by the Contract shall be obtained at the sole cost and expense of the Contractor; and the Contractor shall furnish to the Contracting Officer a Certificate of Insurance in a form satisfactory to the Contracting Officer showing that the Contractor has complied with this Article. Insurance shall be maintained with insurance carriers licensed to do business in New York State and acceptable to the Contracting Officer; shall be primary and non-contributing to any insurance or self insurance maintained by OGS; and shall be endorsed to provide written notice be given to the Contracting Officer at least thirty days prior to the cancellation, non-renewal, or material alteration of such policies, which notice, evidenced by return receipt of United States Certified Mail, any notice shall be addressed to:

Division of Contract Administration

Director

35th Floor, Corning Tower

Albany, New York 12242

19.1.1 **The endorsement shall name The People of the State of New York, its officers, agents, employees , the assigned construction manager, the Office of General Services and/or their representatives and contractors under their employ, the New York State Police and the Nelson and Kimberly Landry, PO Box 932, 1960 State Route 30, Tupper Lake, NY as additional insureds there under.** This additional insured shall be primary and non-contributory. (General Liability Additional Insured Endorsement shall be on Insurance Service Office's (ISO) form number CG 20 10 11 85 and a copy of which shall be furnished along with the Certificate of Insurance.) The Contracting Officer may modify the provisions of this Article when deemed in the best interest of the State by order on contract or field order.

CONSULTANT



CB&I E&I Engineering of New York, P.C.
13 British American Boulevard
Latham, New York 12110-1405

NOTES:

1. SITE PLAN SHOWS THE BUILDINGS SCHEDULED FOR ASBESTOS ABATEMENT.
2. ALL WORK SHALL COMPLY WITH APPLICABLE FEDERAL, STATE, AND LOCAL REGULATIONS.
3. REFER TO SPECIFICATION SECTION 028304 FOR REQUIREMENTS ON REMOVAL AND DISPOSAL OF ASBESTOS CONTAINING MATERIALS. REFER TO FINAL REPORT ASBESTOS SURVEY, TROOP B SUBHEADQUARTERS, TUPPER LAKE, NY, DATED JANUARY 2015.
4. NO SITE SPECIFIC VARIANCES HAVE BEEN APPROVED FOR THE WORK OF THIS CONTRACT. THE CONTRACTOR IS RESPONSIBLE FOR PREPARING AND SUBMITTING ALL SITE SPECIFIC VARIANCES DEEMED NECESSARY TO COMPLETE THE SCOPE OF THE WORK.
5. ELECTRIC SERVICE HAS BEEN DISCONNECTED TO ALL OF THE BUILDINGS. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL ELECTRICAL POWER NECESSARY TO COMPLETE THE WORK.
6. THE BUILDINGS HAVE ACTIVE HOT AND COLD WATER SERVICE AVAILABLE. CONTRACTOR IS RESPONSIBLE FOR PROVIDING VALVED HOT AND COLD WATER FROM OWNER'S SYSTEM.
7. THE CONTRACTOR SHALL PERFORM NEGATIVE EXPOSURE ASSESSMENT(S) (NEA) IN ACCORDANCE WITH THE OSHA ASBESTOS IN CONSTRUCTION STANDARD (29 CFR 1926.1101) TO ENSURE WORKER SAFETY WITH REGARD TO DISTURBANCE OF MATERIALS CONTAINING LESS THAN 1% ASBESTOS. SEE SPECIFICATION SECTION 02B213 FOR ALL BUILDINGS AND MATERIALS REQUIRING AN NEA.
8. THE HEATER AND MASTIC ON THE BASEMENT WALLS IDENTIFIED IN THE FINAL REPORT ASBESTOS SURVEY, TROOP B SUBHEADQUARTERS, TUPPER LAKE, NY, DATED JANUARY 2015 SHALL BE REMOVED AND MANAGED IN ACCORDANCE WITH THE OSHA STANDARDS PRIOR TO DEMOLITION ACTIVITIES THAT COULD IMPACT THEM.

LEGEND:

- E— UNDERGROUND ELECTRIC LINE
- S— SANITARY LINE
- - - - - PROPERTY LINE

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.

CONTRACT:

CONSTRUCTION

TITLE:

SITE PLAN

LOCATION:

FORMER NYS POLICE TUPPER LAKE
1960 ROUTE 30
TUPPER LAKE, NEW YORK

CLIENT:

NEW YORK STATE POLICE


MARK	DATE	DESCRIPTION
	4/14/16	FINAL SUBMISSION
PROJECT NUMBER:	44604 - H	
DESIGNED BY:	MJS	
DRAWN BY:	DDG	
FIELD CHECK:	GW	
APPROVED:	MJS	

SHEET TITLE:

SITE PLAN

DRAWING NUMBER:

H-100

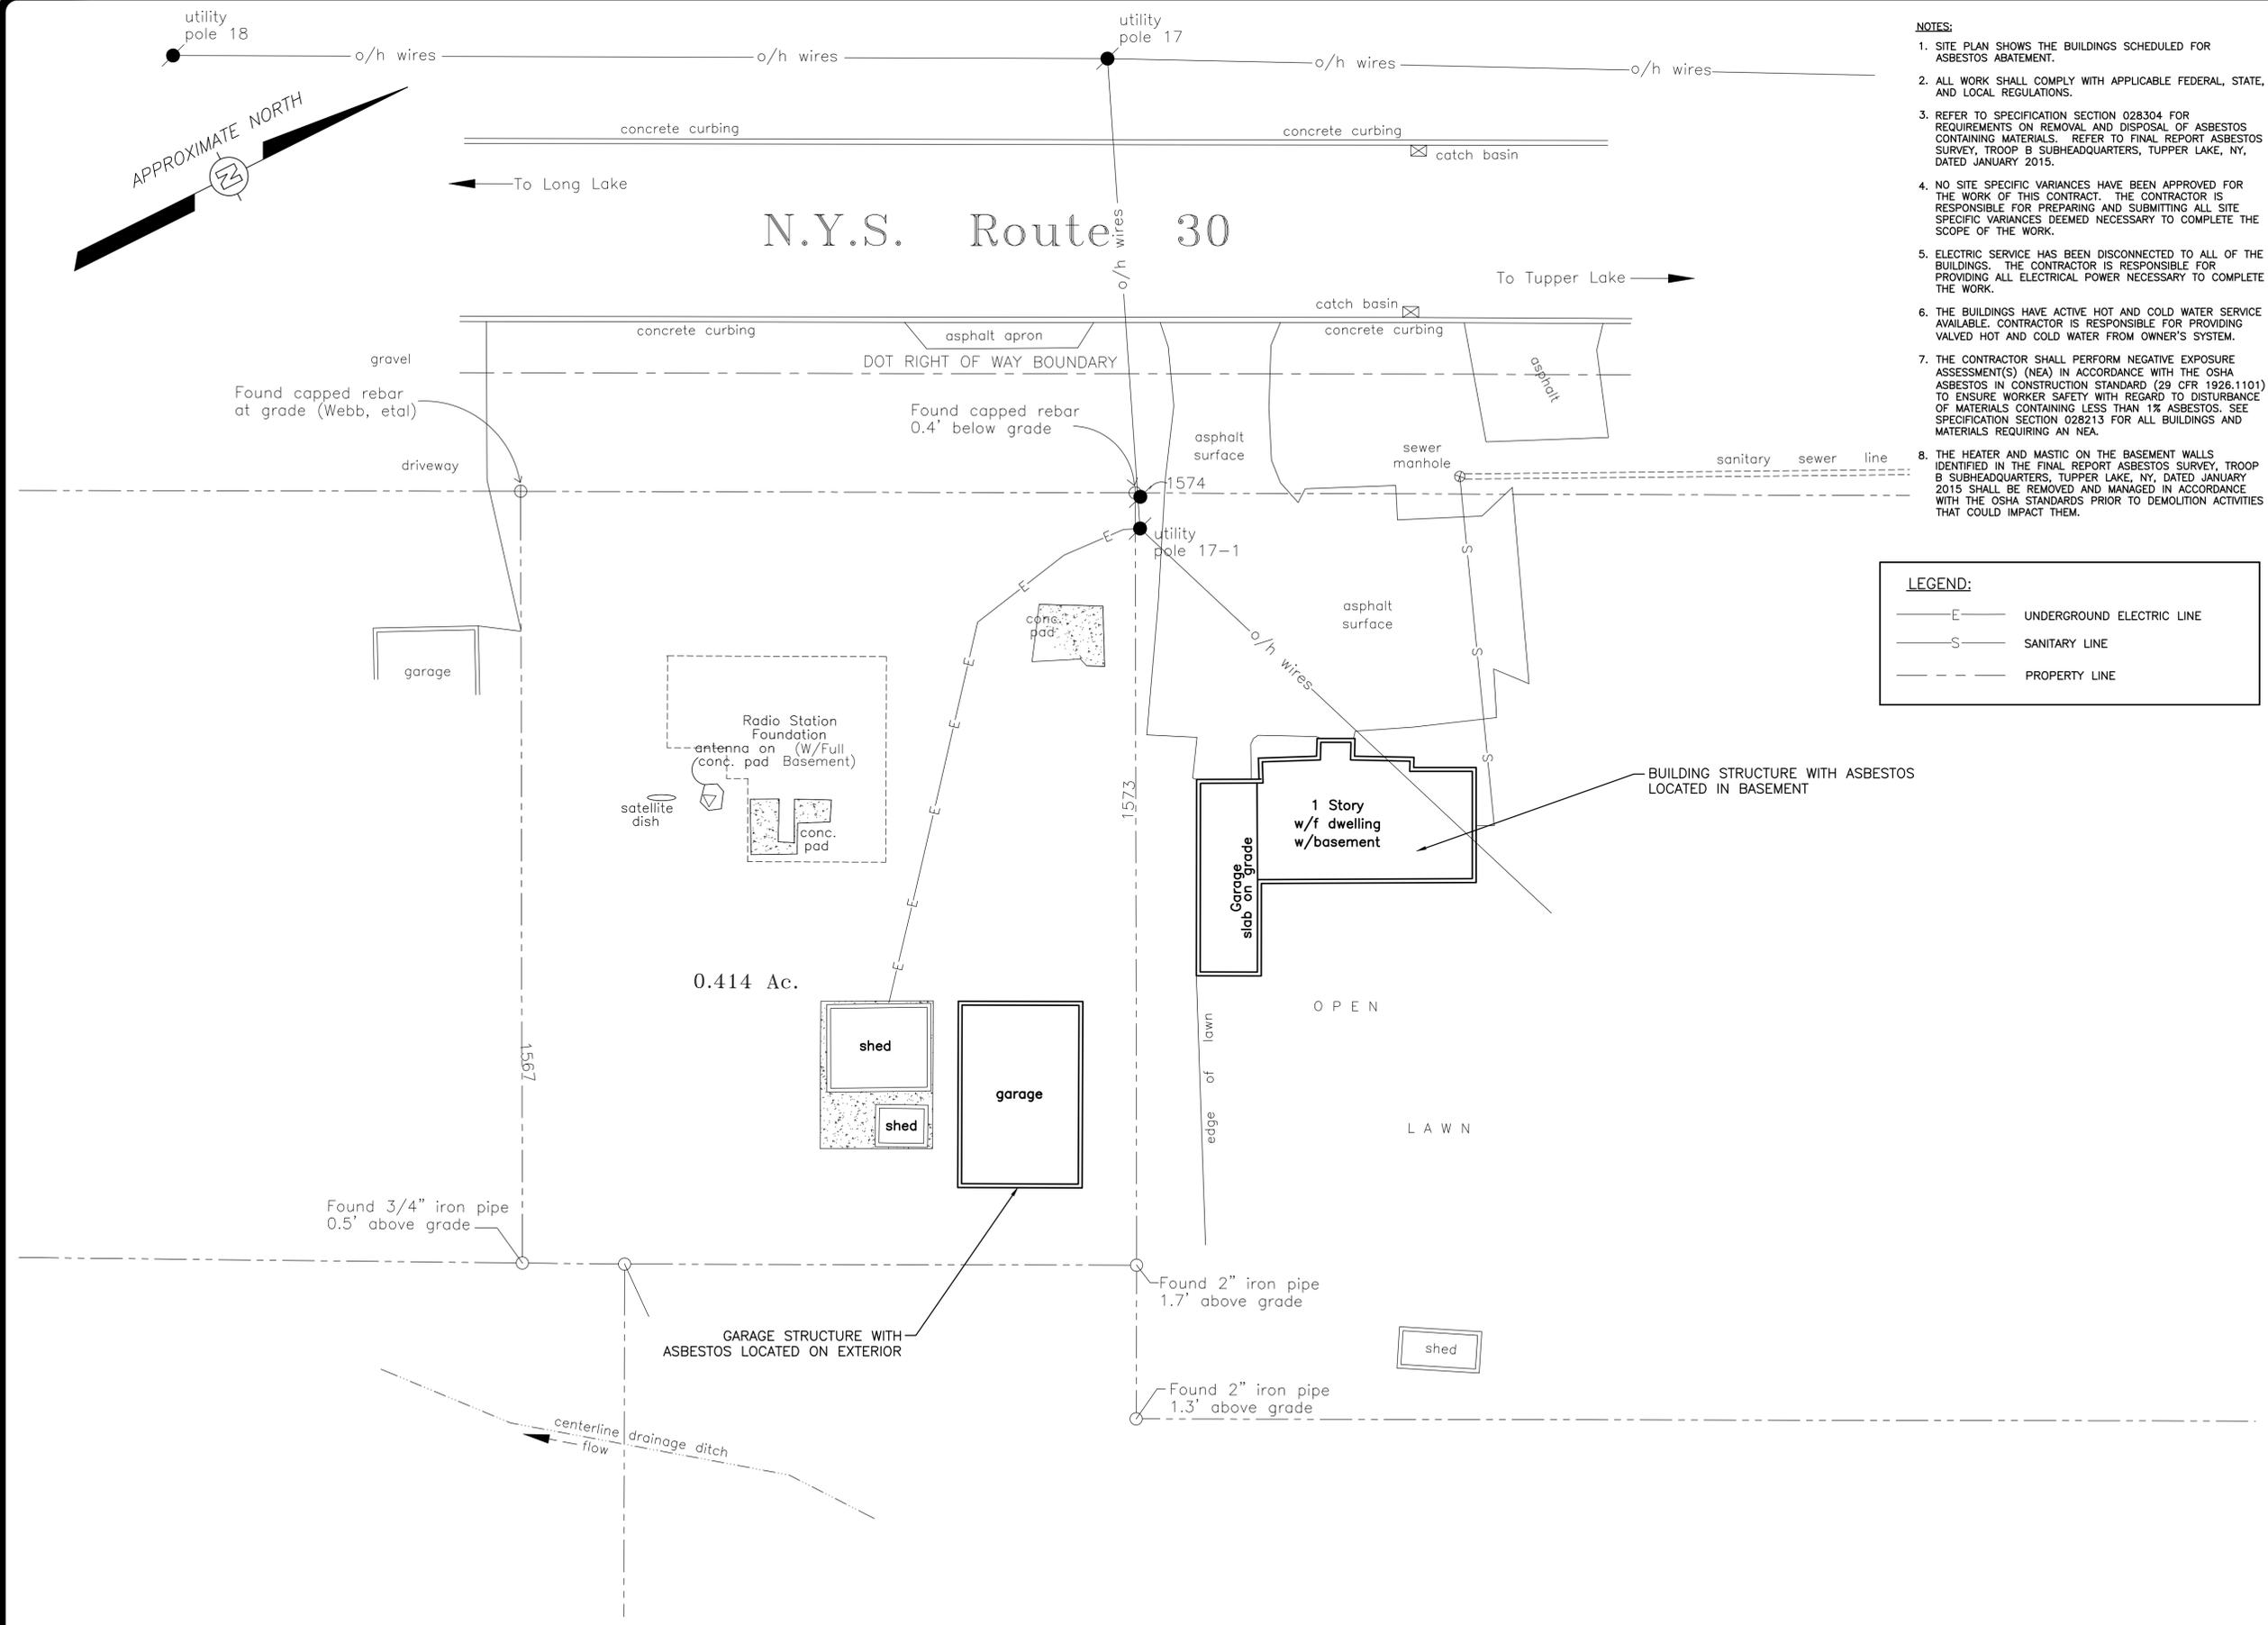

REFERENCE:
MAP PREPARED BY GEOMATICS LAND SURVEYING, P.C. P.O. BOX 1277, SARANAC LAKE, NY, TITLED: BEING PART OF LOTS 2, 3 & 4, A, STEPINOCK VILLAGE ALLOTMENT, BLOCK 4E, VILLAGE OF TUPPER LAKE, FRANKLIN COUNTY, NEW YORK. SURVEY DATED: JULY 31, 2013, MAP NUMBER: 13029.

Apr 21, 2016 - 9:26am
U:\Project\NY6005\14794\Tupper Lake\FINAL DESIGN DRAWINGS\CAD\H-1 00.dwg
36x24 PLOT SHEET

CONSULTANT



CB&I E&I Engineering of New York, P.C.
13 British American Boulevard
Latham, New York 12110-1405

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.

CONTRACT:

CONSTRUCTION

TITLE:

HAZARDOUS MATERIAL REMOVAL PLAN

LOCATION:

FORMER NYS POLICE TUPPER LAKE
1960 ROUTE 30
TUPPER LAKE, NEW YORK

CLIENT:

NEW YORK STATE POLICE

MARK	DATE	DESCRIPTION
	4/14/16	FINAL SUBMISSION

PROJECT NUMBER:	44604 - H
DESIGNED BY:	MJS
DRAWN BY:	DDG
FIELD CHECK:	GW
APPROVED:	MJS

SHEET TITLE:

HAZARDOUS MATERIAL REMOVAL PLAN

DRAWING NUMBER:

H-101

NOTES:



1. REFER TO H-100 FOR THE SITE PLAN WHICH SHOWS THE BUILDINGS SCHEDULED FOR ASBESTOS ABATEMENT.

KEY NOTES:

- ① HEATER (1 SF) IS ASBESTOS CONTAINING. REMOVE ENTIRE HEATER INTACT AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.
- ② MASTIC (20 SF) IS ASBESTOS CONTAINING. REMOVE AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.

LEGEND:

--- PROPERTY LINE

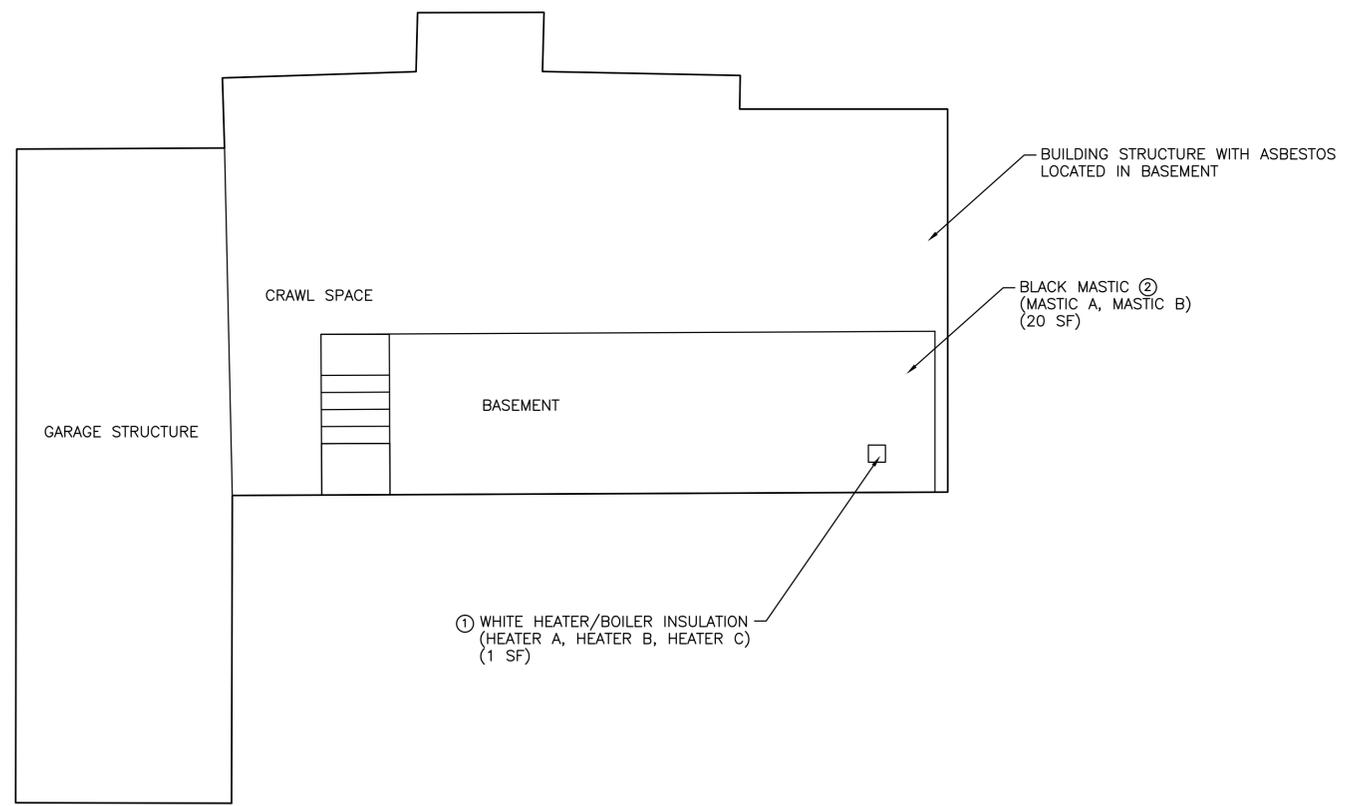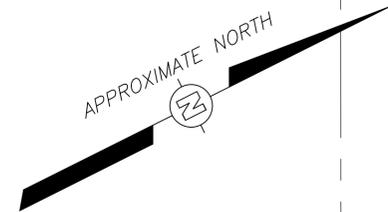

REFERENCE:

MAP PREPARED BY GEOMATICS LAND SURVEYING, P.C. P.O. BOX 1277, SARANAC LAKE, NY, TITLED: BEING PART OF LOTS 2, 3 & 4, A, STEPINOCK VILLAGE ALLOTMENT, BLOCK 4E, VILLAGE OF TUPPER LAKE, FRANKLIN COUNTY, NEW YORK. SURVEY DATED: JULY 31, 2013, MAP NUMBER: 13029.

CONSULTANT



CB&I E&I Engineering of New York, P.C.
13 British American Boulevard
Latham, New York 12110-1405

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.

CONTRACT:

CONSTRUCTION

TITLE:

HAZARDOUS MATERIAL REMOVAL PLAN

LOCATION:

FORMER NYS POLICE TUPPER LAKE
1960 ROUTE 30
TUPPER LAKE, NEW YORK

CLIENT:

NEW YORK STATE POLICE

MARK	DATE	DESCRIPTION
	4/14/16	FINAL SUBMISSION
PROJECT NUMBER:	44604 - H	
DESIGNED BY:	MJS	
DRAWN BY:	DDG	
FIELD CHECK:	GW	
APPROVED:	MJS	

SHEET TITLE:

HAZARDOUS MATERIAL REMOVAL PLAN

DRAWING NUMBER:

H-102

NOTES:

1. REFER TO H-100 FOR THE SITE PLAN WHICH SHOWS THE BUILDINGS SCHEDULED FOR ASBESTOS ABATEMENT.


KEY NOTES:

- ① DOOR GLAZING COMPOUND (17 LINEAR FEET) IS ASBESTOS CONTAINING. REMOVE ENTIRE WINDOW INTACT AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.
- ② WINDOW GLAZING COMPOUND (50 LINEAR FEET) IS ASBESTOS CONTAINING. REMOVE ALL WINDOWS INTACT AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.
- ③ EXTERIOR EDGE CAULK (32 LINEAR FEET) IS ASBESTOS CONTAINING. REMOVE AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.
- ④ EXPANSION CAULK AROUND GARAGE DOORS (60 LINEAR FEET) IS ASBESTOS CONTAINING. REMOVE AS ASBESTOS AND DISPOSE OF BY APPROPRIATE LEGAL MEANS.

LEGEND:

--- PROPERTY LINE

APPROXIMATE NORTH

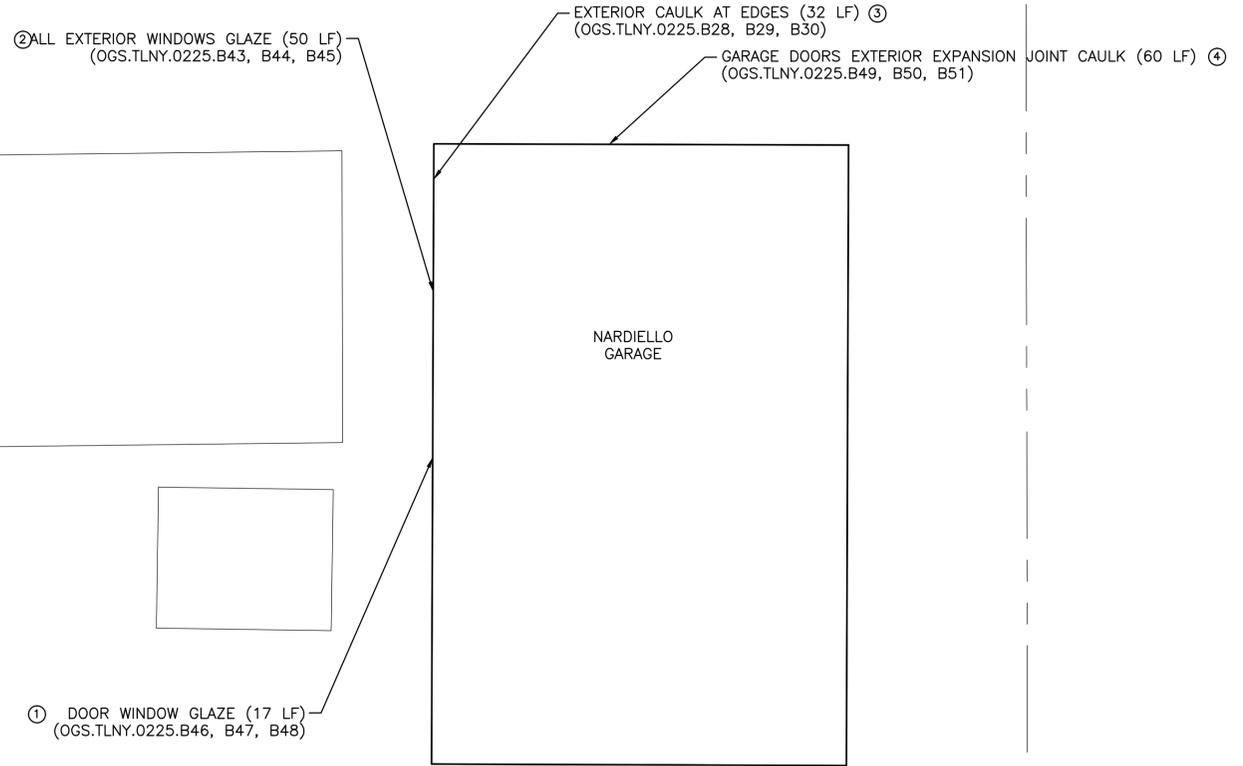

REFERENCE:
MAP PREPARED BY GEOMATICS LAND SURVEYING, PC, P.O. BOX 1277, SARANAC LAKE, NY, TITLED: BEING PART OF LOTS 2, 3 & 4, A, STEPINOCK VILLAGE ALLOTMENT, BLOCK 4E, VILLAGE OF TUPPER LAKE, FRANKLIN COUNTY, NEW YORK. SURVEY DATED: JULY 31, 2013, MAP NUMBER: 13029.

