



Office of General Services

DESIGN & CONSTRUCTION GROUP
THE GOVERNOR NELSON A. ROCKEFELLER
EMPIRE STATE PLAZA
ALBANY, NY 12242

ADDENDUM NO. 6 TO PROJECT NO. 47164

CONSTRUCTION AND ELECTRICAL WORK
PROVIDE FOUNDATION REMEDIATION AND CONCRETE REPAIR
CONKLINGVILLE DAM
233 COUNTY ROUTE 8
HADLEY, NEW YORK

September 9, 2026


NOTE: This Addendum forms a part of the Contract Documents. Insert it in the Project Manual. Acknowledge receipt of this Addendum in the space provided on the Bid Form.
--

CONSTRUCTION WORK DRAWINGS


1. Revised Drawings:
 - a. Drawing Nos. C-716, S-711, and S-793, noted Addendum #6, dated 9/4/2026, accompanies this addendum and supersedes the same numbered previously issued drawings.

END OF ADDENDUM


Brady M. Sherlock, P.E.
Director, Division of Design
Design & Construction

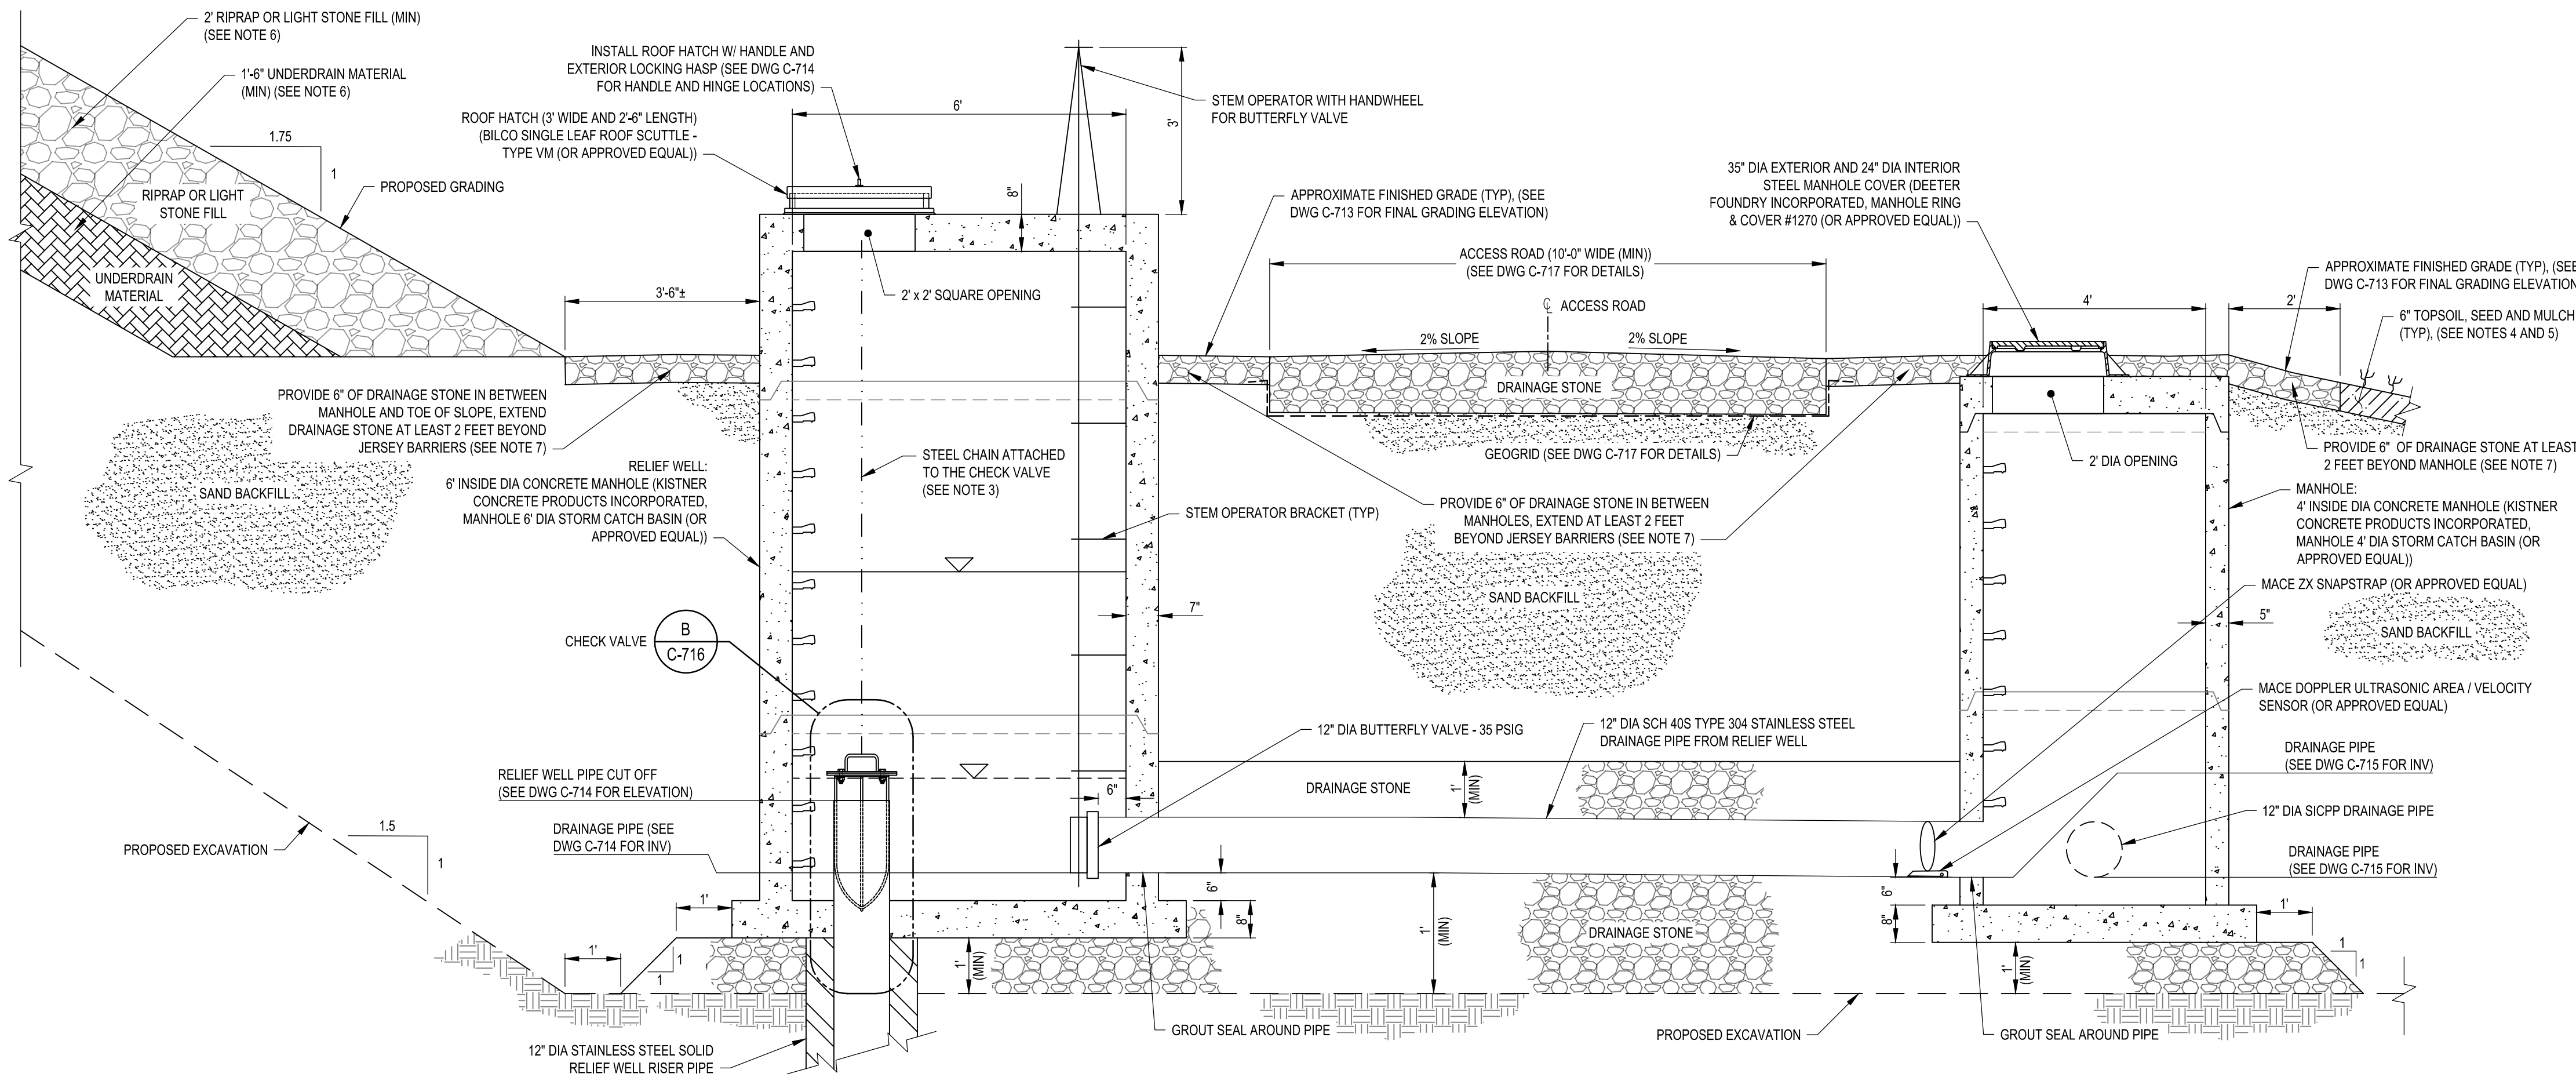


A RELIEF WELL AND MANHOLE EXCAVATION AND BACKFILL TYPICAL SECTION
SCALE: 1/2" = 1'-0"
NOTE: SECTION SHOWN AT RW-2 AND MH-2 LOCATION, ALL OTHER LOCATIONS SIMILAR PER NOTE 2 ON THIS DWG AND DWG'S C-712 THRU C-715.

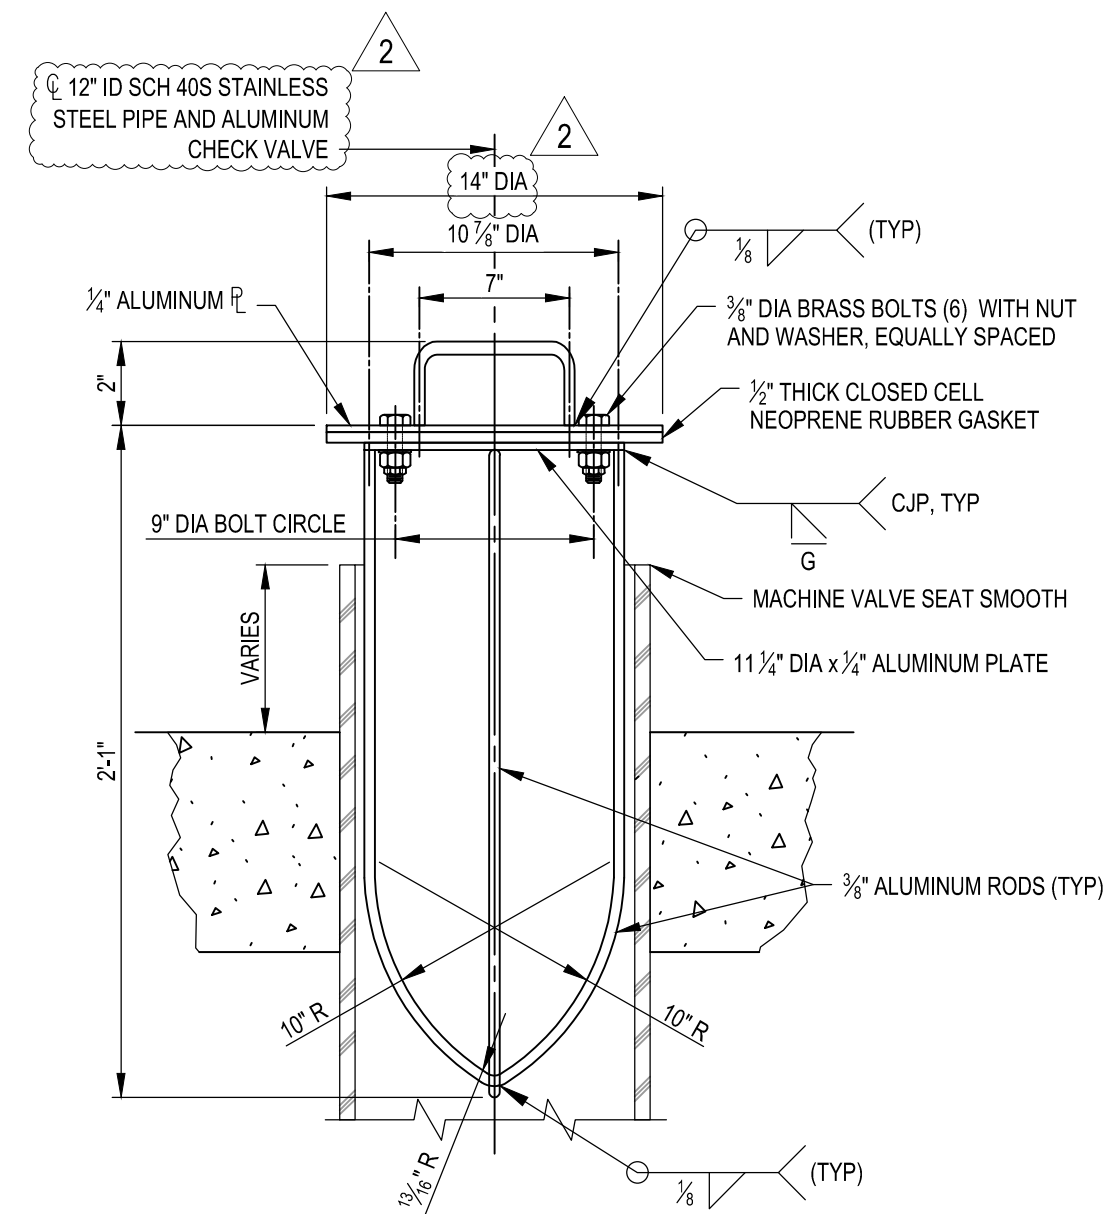


B CHECK VALVE DETAIL
SCALE: NTS

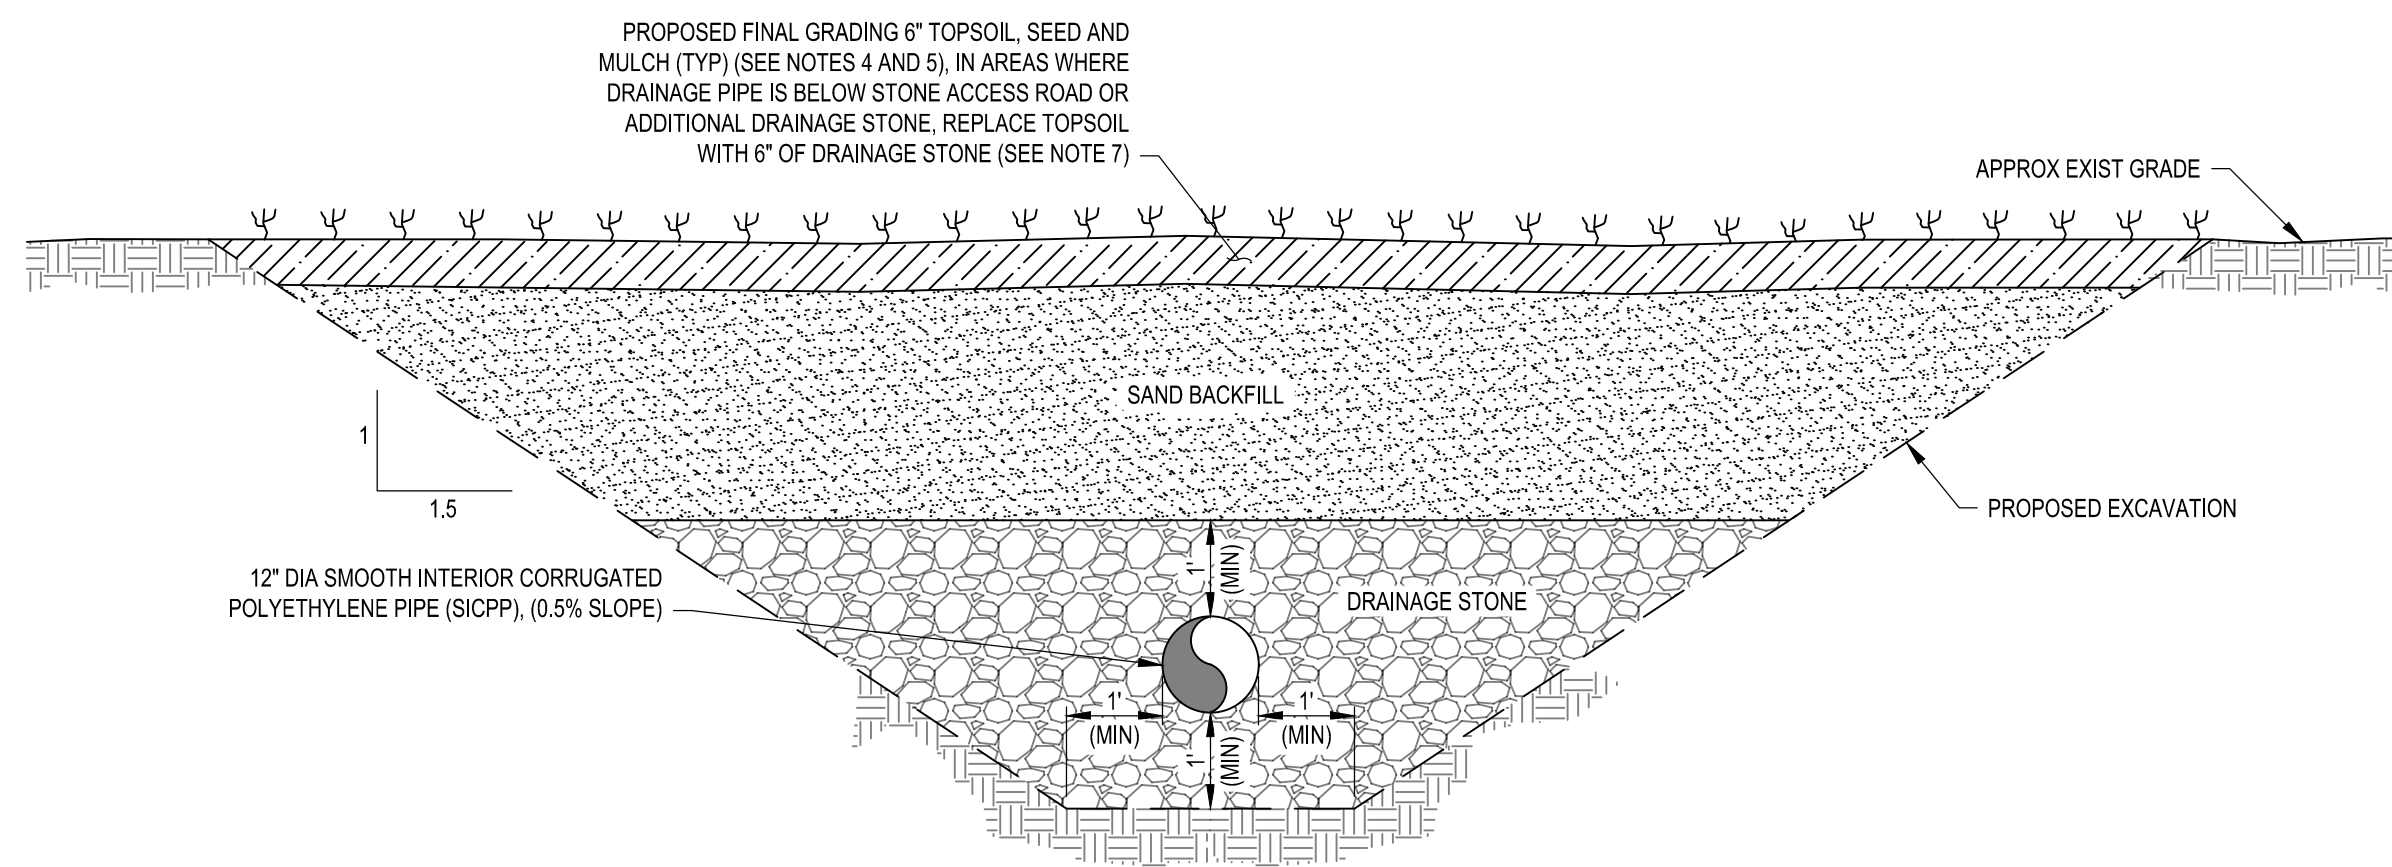

C DRAINAGE PIPE EXCAVATION AND BACKFILL TYPICAL SECTION
SCALE: NTS

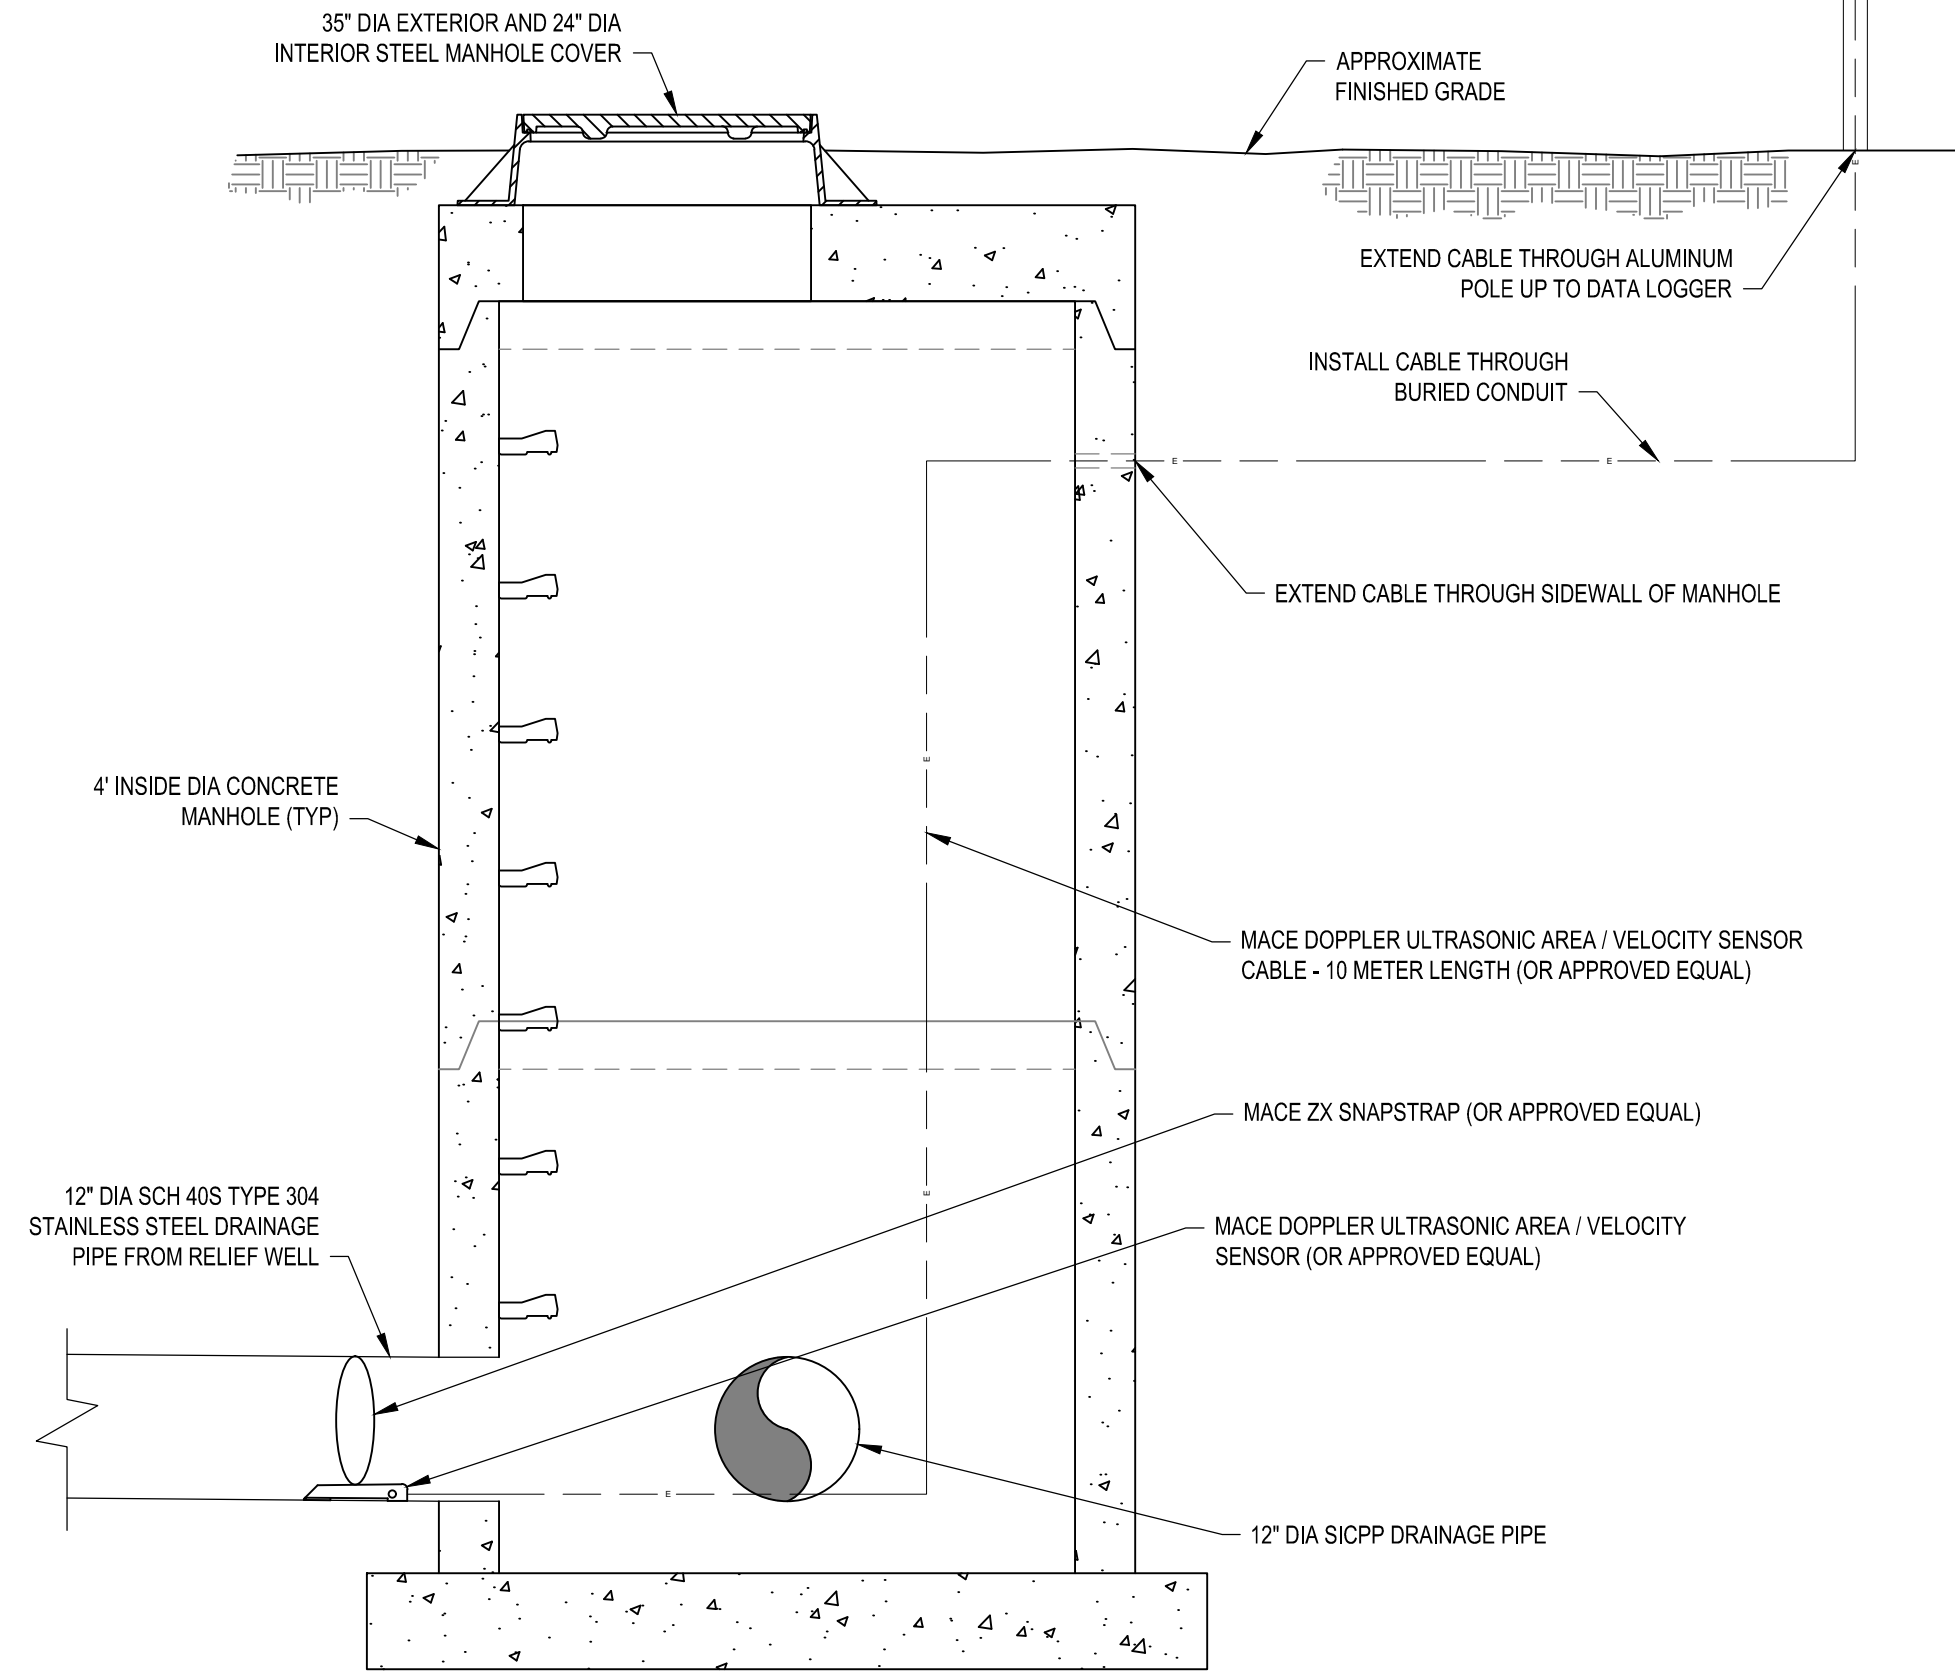

D FLOW MONITORING EQUIPMENT DETAIL SECTION
SCALE: 3/4" = 1'-0"

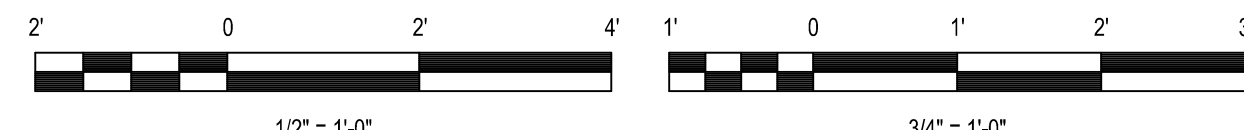

DRAWING NOTES

- SEE DRAWINGS G-002 & G-003 FOR ADDITIONAL NOTES.
- THE EXCAVATION AND BACKFILL SECTION SHOWN IS TYPICAL FOR RW-1 THROUGH RW-5 AND MH-1 THROUGH MH-5.
- PROVIDE A STEEL CHAIN WITH ONE ATTACHED TO THE CHECK VALVE AND THE OTHER END CLIPPED TO THE TOP OF THE CONCRETE MANHOLE BY THE ROOF HATCH. CHAIN SHALL BE USED TO REPLACE THE CHECK VALVE IN THE EVENT THAT THE CHECK VALVE BECOMES DETACHED FROM THE RELIEF WELL RISER PIPE.
- THE TYPE OF SEEDING DEPENDS ON THE ACCEPTABLE DATES AND SHALL BE DONE AS PER SECTION 329200 OF THE TECHNICAL SPECIFICATIONS.
- INSTALL TREE/VEGETATION PROTECTIVE FENCES AROUND NEWLY TOPSOILED, SEED, AND MULCHED AREAS IMMEDIATELY AFTER MULCHING AND CONTINUOUSLY MAINTAINED THROUGHOUT CONSTRUCTION. THIS IS TO PROTECT FROM COMPACTION WHICH WILL KEEP SEED FROM GERMINATING. SEE SECTION 310000 OF THE TECHNICAL SPECIFICATIONS.
- PLACE 2 FEET MINIMUM OF STOCKPILED EXISTING RIPRAP AND 1.5 FEET MINIMUM OF UNDERDRAIN MATERIAL ALONG THE FINAL GRADE SLOPE AS INDICATED ON DRAWING C-713. LIGHT STONE FILL CAN BE PLACED ALONG THE SLOPE ABOVE THE UNDERDRAIN MATERIAL IF THERE IS NOT ENOUGH STOCKPILED EXISTING RIPRAP.
- PROVIDE 6 INCHES OF DRAINAGE STONE AROUND AND IN BETWEEN MANHOLES OUTSIDE OF THE ACCESS ROAD LIMITS. EXTEND THE DRAINAGE STONE UP TO THE TOE OF THE DOWNSTREAM SLOPE AND A MINIMUM OF 2 FEET BEYOND JERSEY BARRIERS AND MANHOLES. SEE DRAWING C-713 FOR EXTENTS OF DRAINAGE STONE.

DESIGN & CONSTRUCTION

CONSULTANT

CERTIFICATE OF AUTHORIZATION #: 0020747



280 East Broad Street
Suite 200
Rochester, NY 14604
Phone: 585.232.5135
COLLIERS ENGINEERING & DESIGN CT, P.C.
www.colliersengineering.com

UNIFORM CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 UNIFORM CODE.

ENERGY CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 ENERGY CODE.

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.



CONTRACT:

CONSTRUCTION

TITLE: PROVIDE FOUNDATION
REMEDICATION AND CONCRETE
REPAIR CONKLINGVILLE DAM
NYS DAM ID #205-0415

LOCATION: 233 COUNTY ROUTE 8
HADLEY, NY
SARATOGA COUNTY

CLIENT: NYS DEPARTMENT OF
ENVIRONMENTAL CONSERVATION

BID DOCUMENTS


MARK	DATE	DOCUMENTS
2	09/04/2026	ADDENDUM #6
1	07/13/2026	ADDENDUM #5
0	06/22/2026	BID DOCUMENTS
MARK	DATE	DOCUMENTS
PROJECT NUMBER:	47164-C	
DESIGNED BY:	KMM	
DRAWN BY:	MDI	
FIELD CHECK:	-	
APPROVED:	JMR	
SHEET TITLE:	RELIEF WELL & MANHOLE DETAILS - 1	

DRAWING NUMBER:

C-716

SHEET 31

OF 148

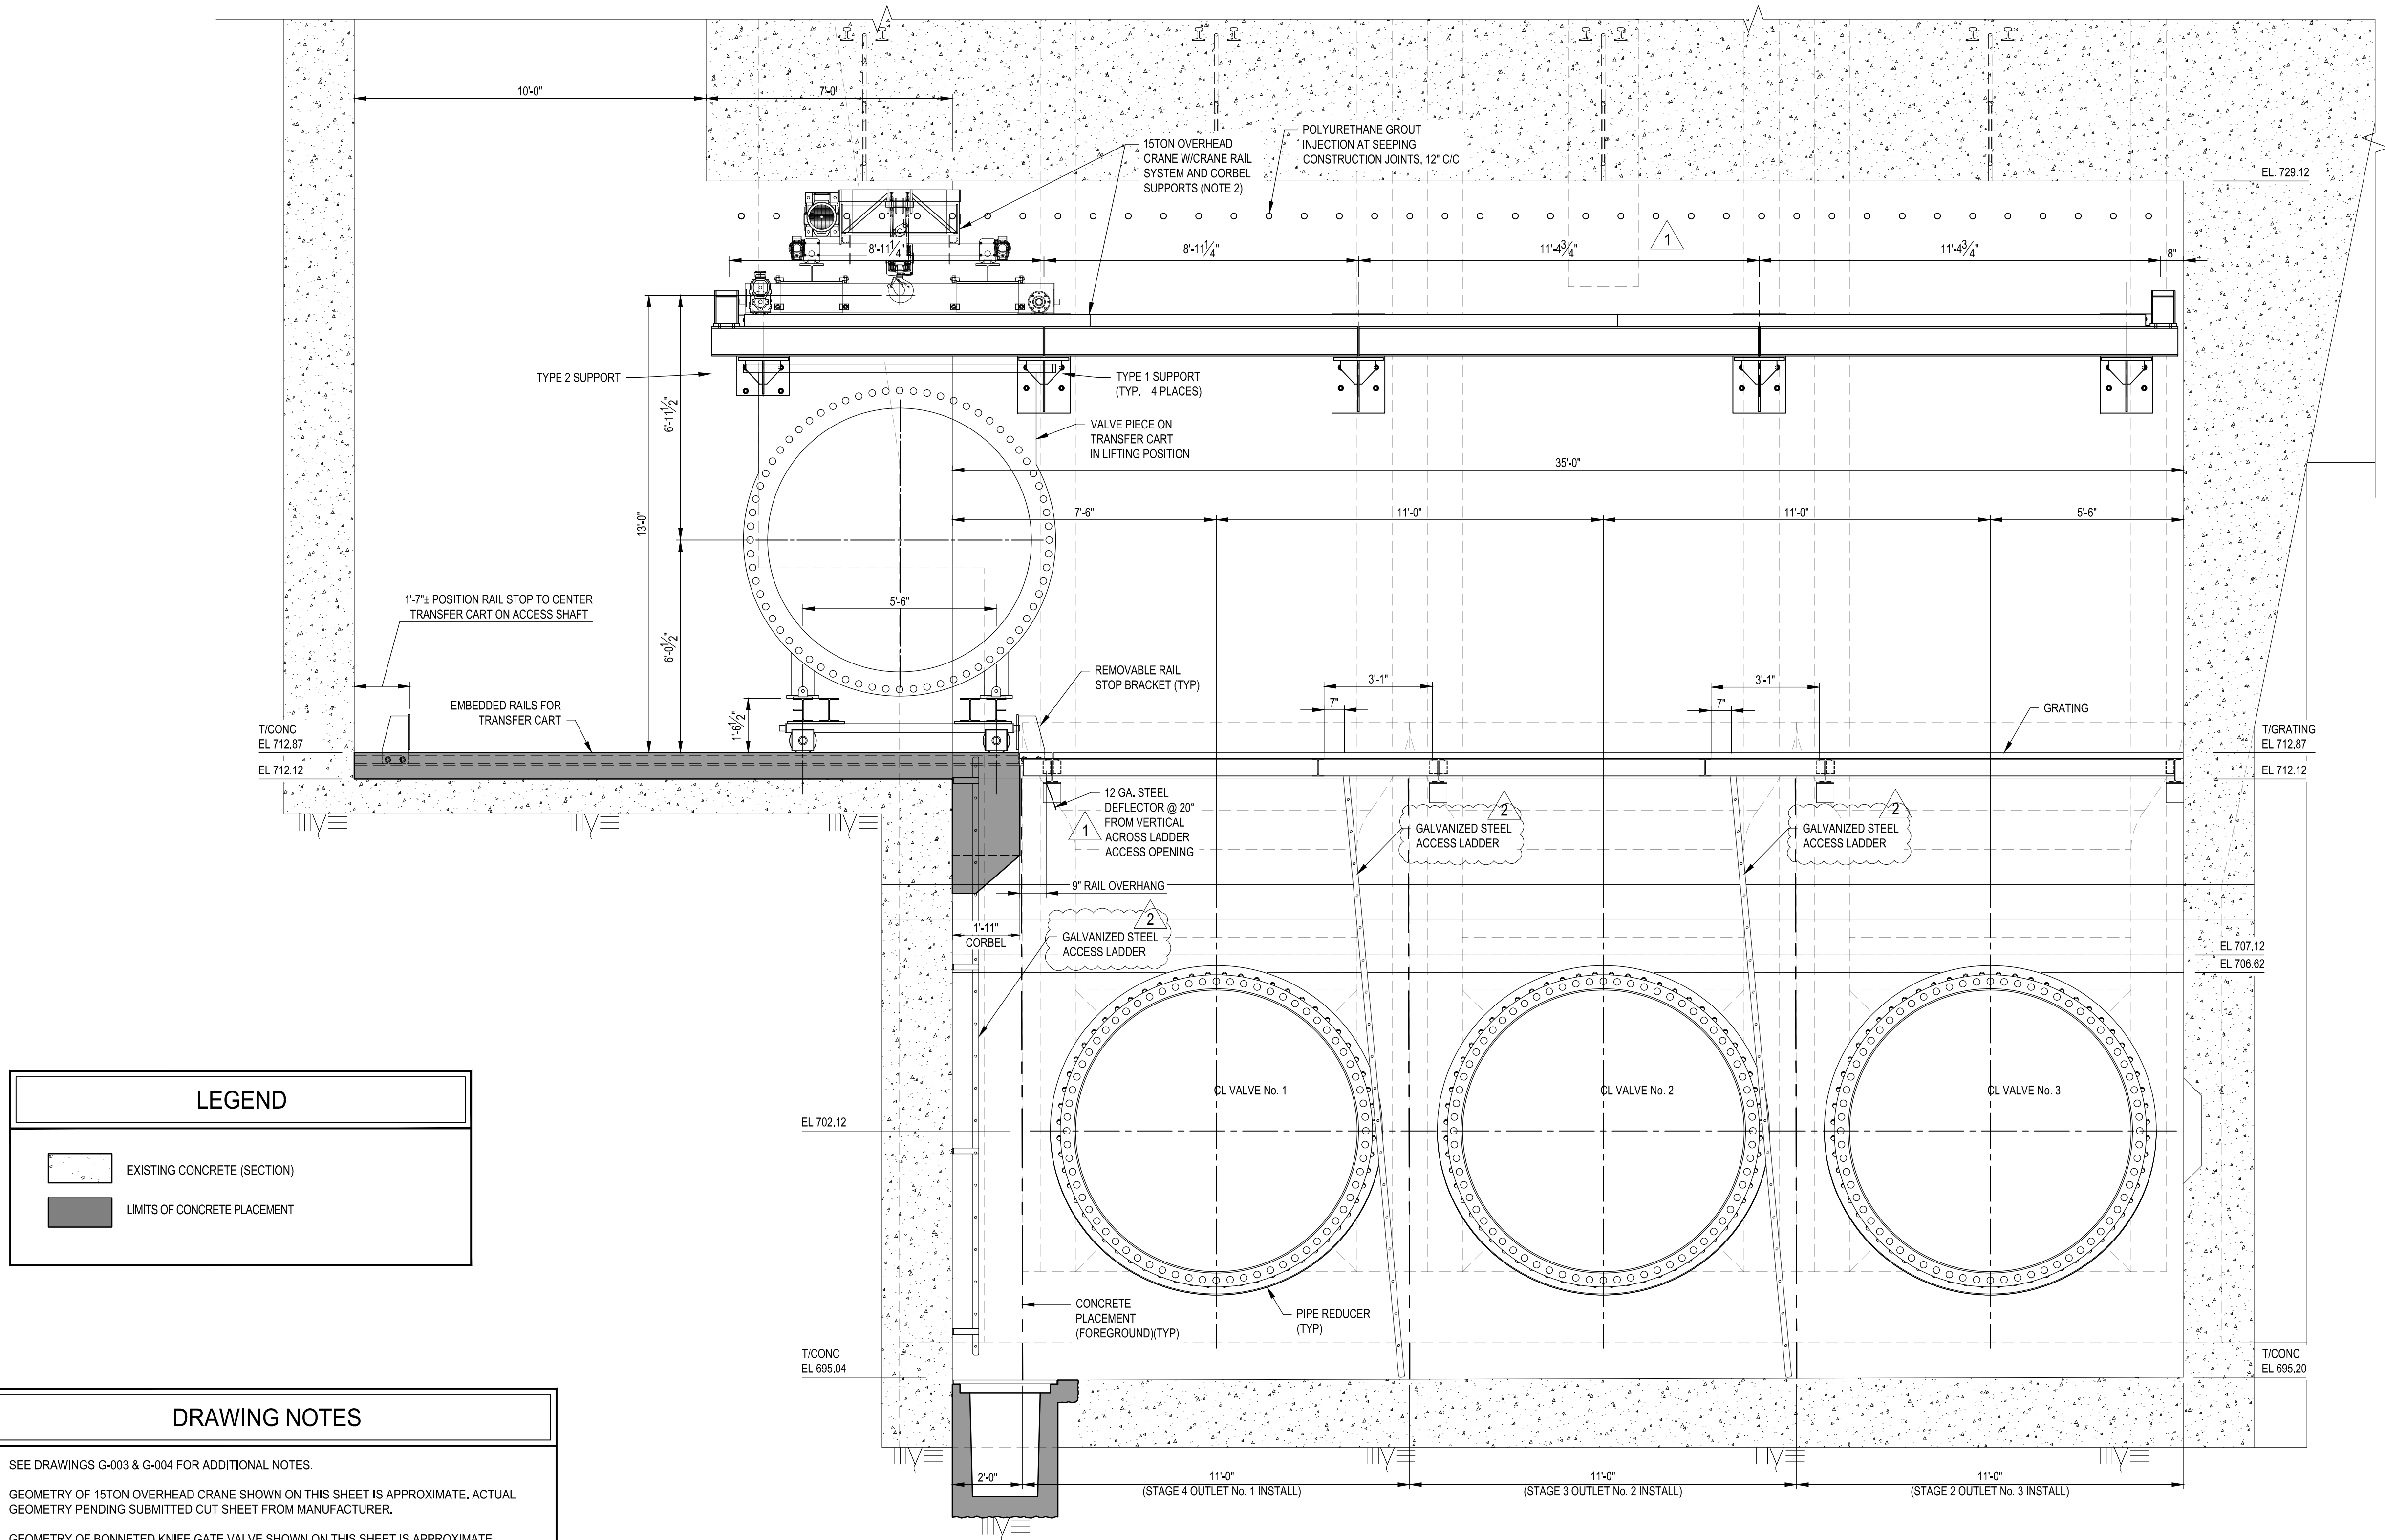

LEGEND

- EXISTING CONCRETE (SECTION)
- LIMITS OF CONCRETE PLACEMENT

DRAWING NOTES

- SEE DRAWINGS G-003 & G-004 FOR ADDITIONAL NOTES.
- GEOMETRY OF 15TON OVERHEAD CRANE SHOWN ON THIS SHEET IS APPROXIMATE. ACTUAL GEOMETRY PENDING SUBMITTED CUT SHEET FROM MANUFACTURER.
- GEOMETRY OF BONNETED KNIFE GATE VALVE SHOWN ON THIS SHEET IS APPROXIMATE. ACTUAL GEOMETRY PENDING SUBMITTED CUT SHEET FROM MANUFACTURER.
- NOT ALL ELECTRICAL DEVICES AND EQUIPMENT ARE SHOWN FOR CLARITY, REFER TO DRAWING SERIES E-700 AND THOROUGHLY COORDINATE ALL WORK BETWEEN CONTRACTORS.

DESIGN & CONSTRUCTION

CONSULTANT

CERTIFICATE OF AUTHORIZATION #: 0020747



Engineering & Design

280 East Broad Street
Suite 200
Rochester, NY 14604
Phone: 585.232.5135
COLLIERS ENGINEERING & DESIGN CT, P.C.
www.colliersengineering.com

UNIFORM CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 UNIFORM CODE.

ENERGY CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 ENERGY CODE.

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.



CONTRACT:

CONSTRUCTION

TITLE: PROVIDE FOUNDATION
REMEDATION AND CONCRETE
REPAIR CONKLINGVILLE DAM
NYS DAM ID #205-0415

LOCATION: 233 COUNTY ROUTE 8
HADLEY, NY
SARATOGA COUNTY

CLIENT: NYS DEPARTMENT OF
ENVIRONMENTAL CONSERVATION

BID DOCUMENTS

MARK	DATE	DESCRIPTION
2	09/04/2026	ADDENDUM #6
1	08/28/2026	ADDENDUM #4
0	06/22/2026	BID DOCUMENTS

PROJECT NUMBER: 47164-C, E

DESIGNED BY: RCP

DRAWN BY: MDI

FIELD CHECK: -

APPROVED: JMR

SHEET TITLE:



OUTLET STRUCTURE
GENERAL ARRANGEMENT
SECTION - 1

DRAWING NUMBER:

S-711

SHEET 59

OF 148

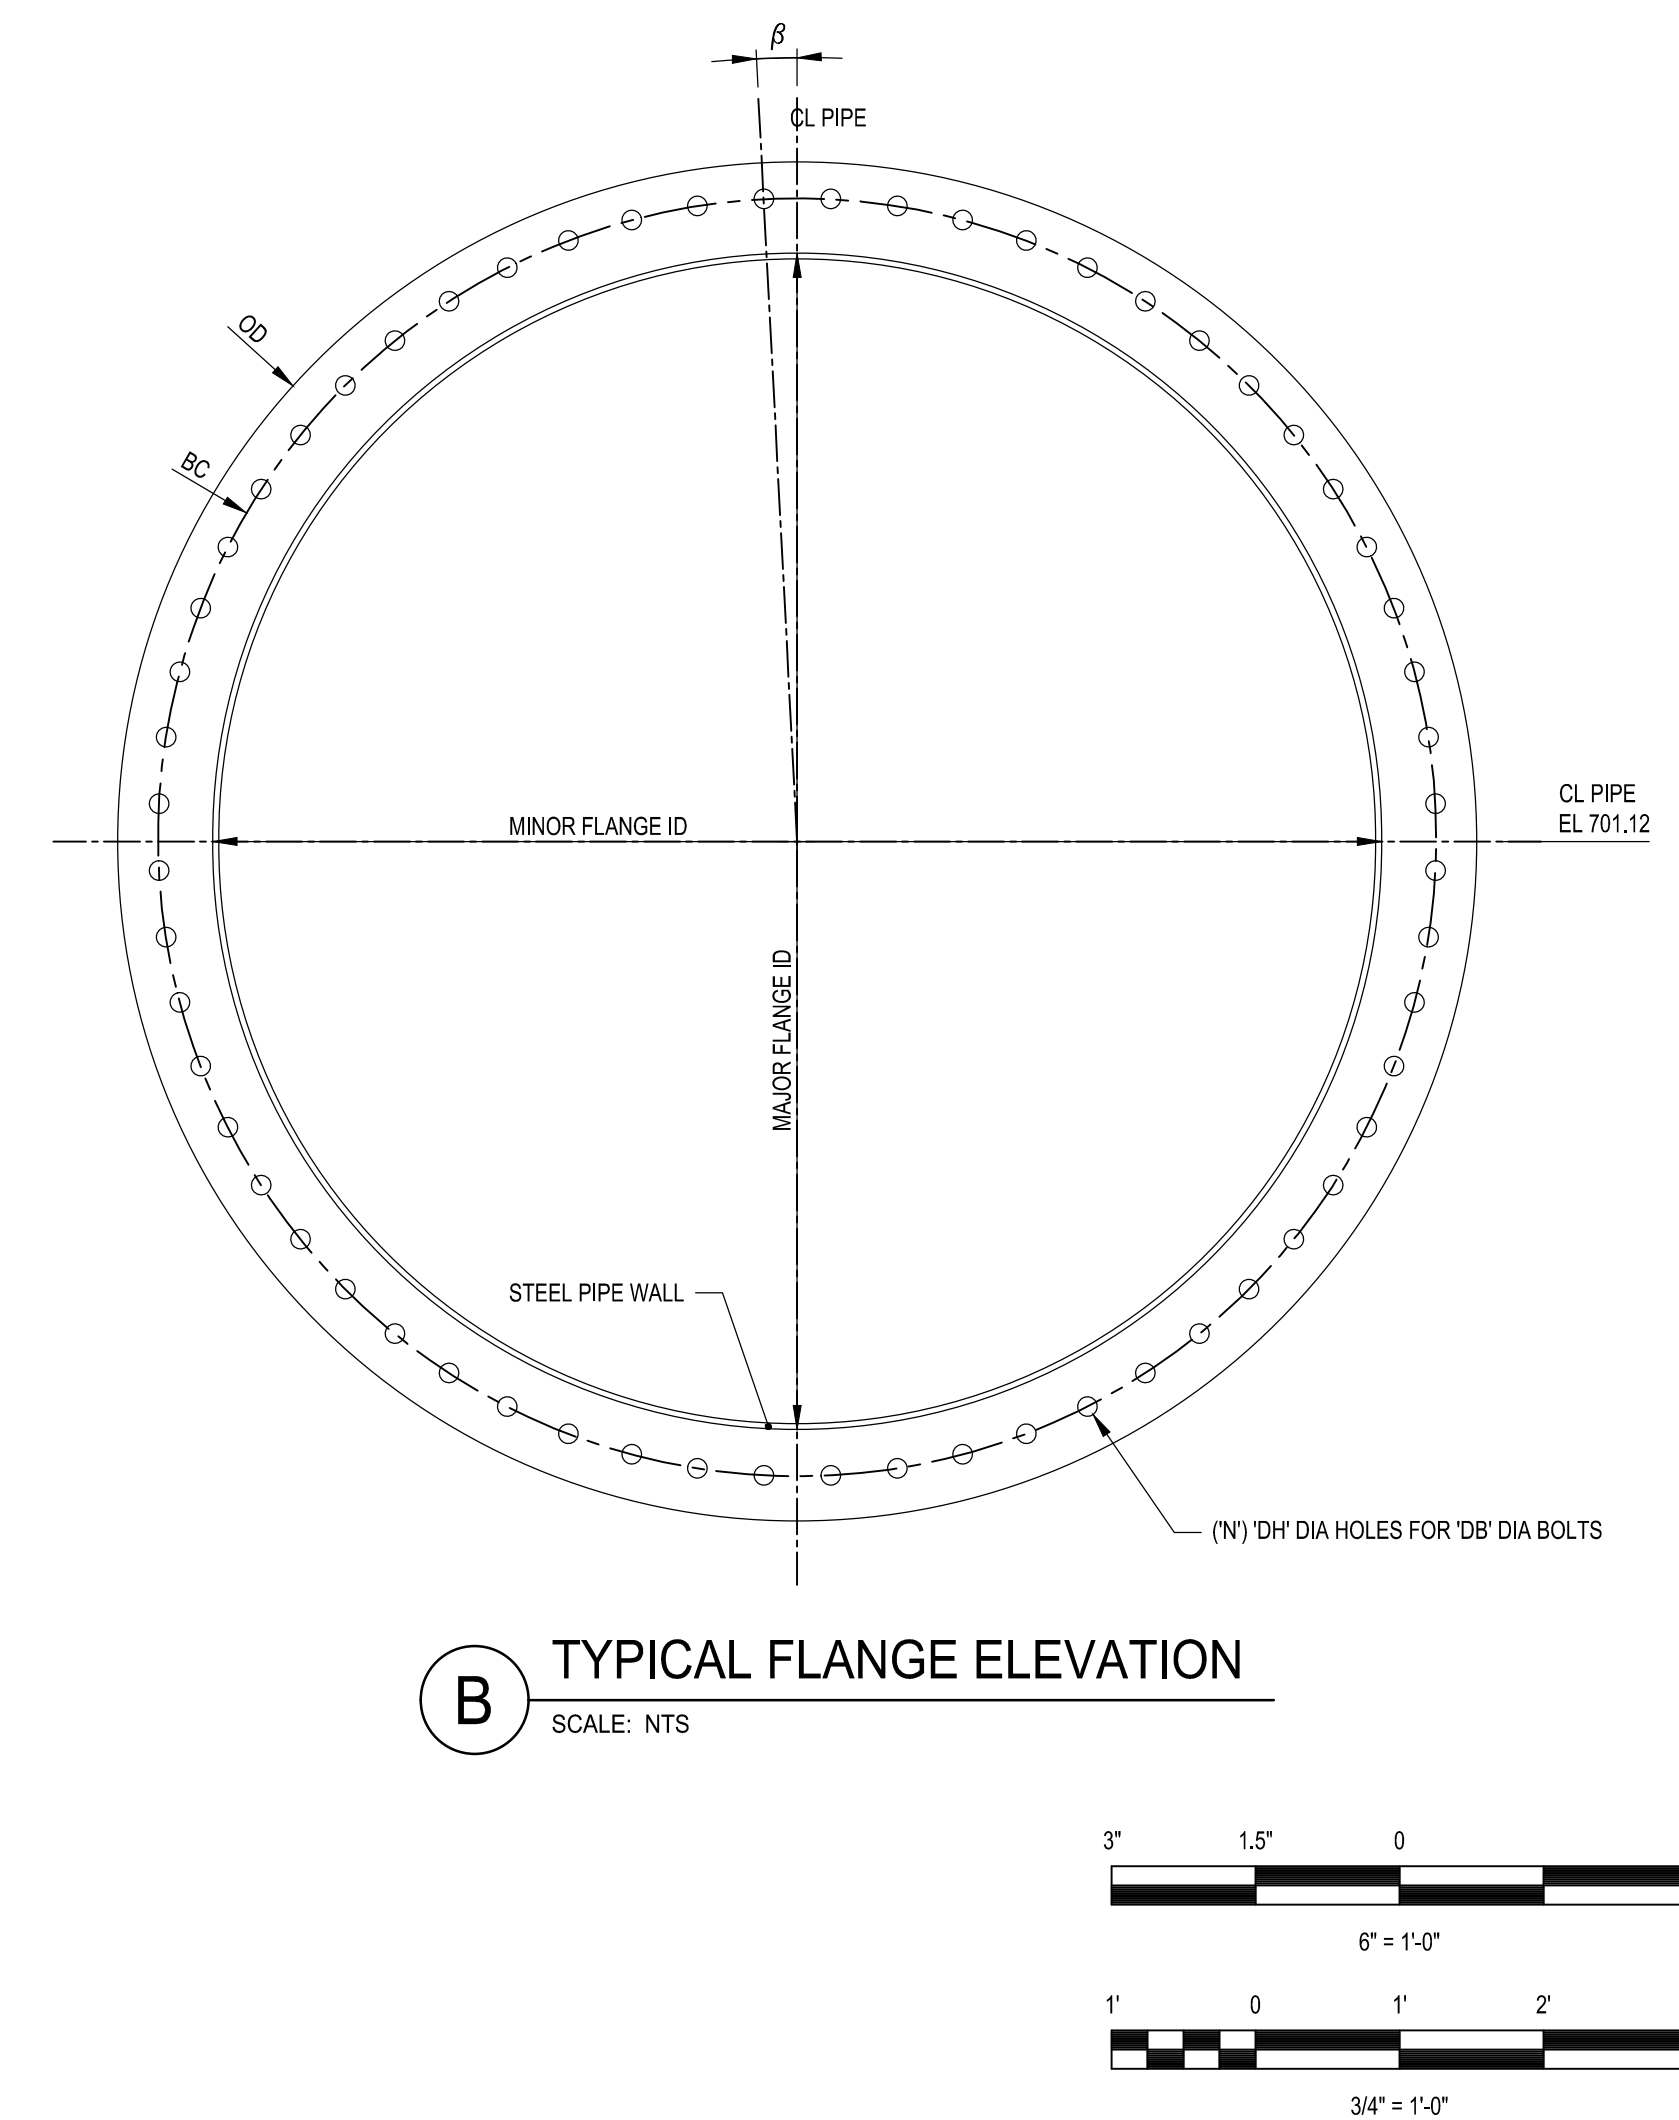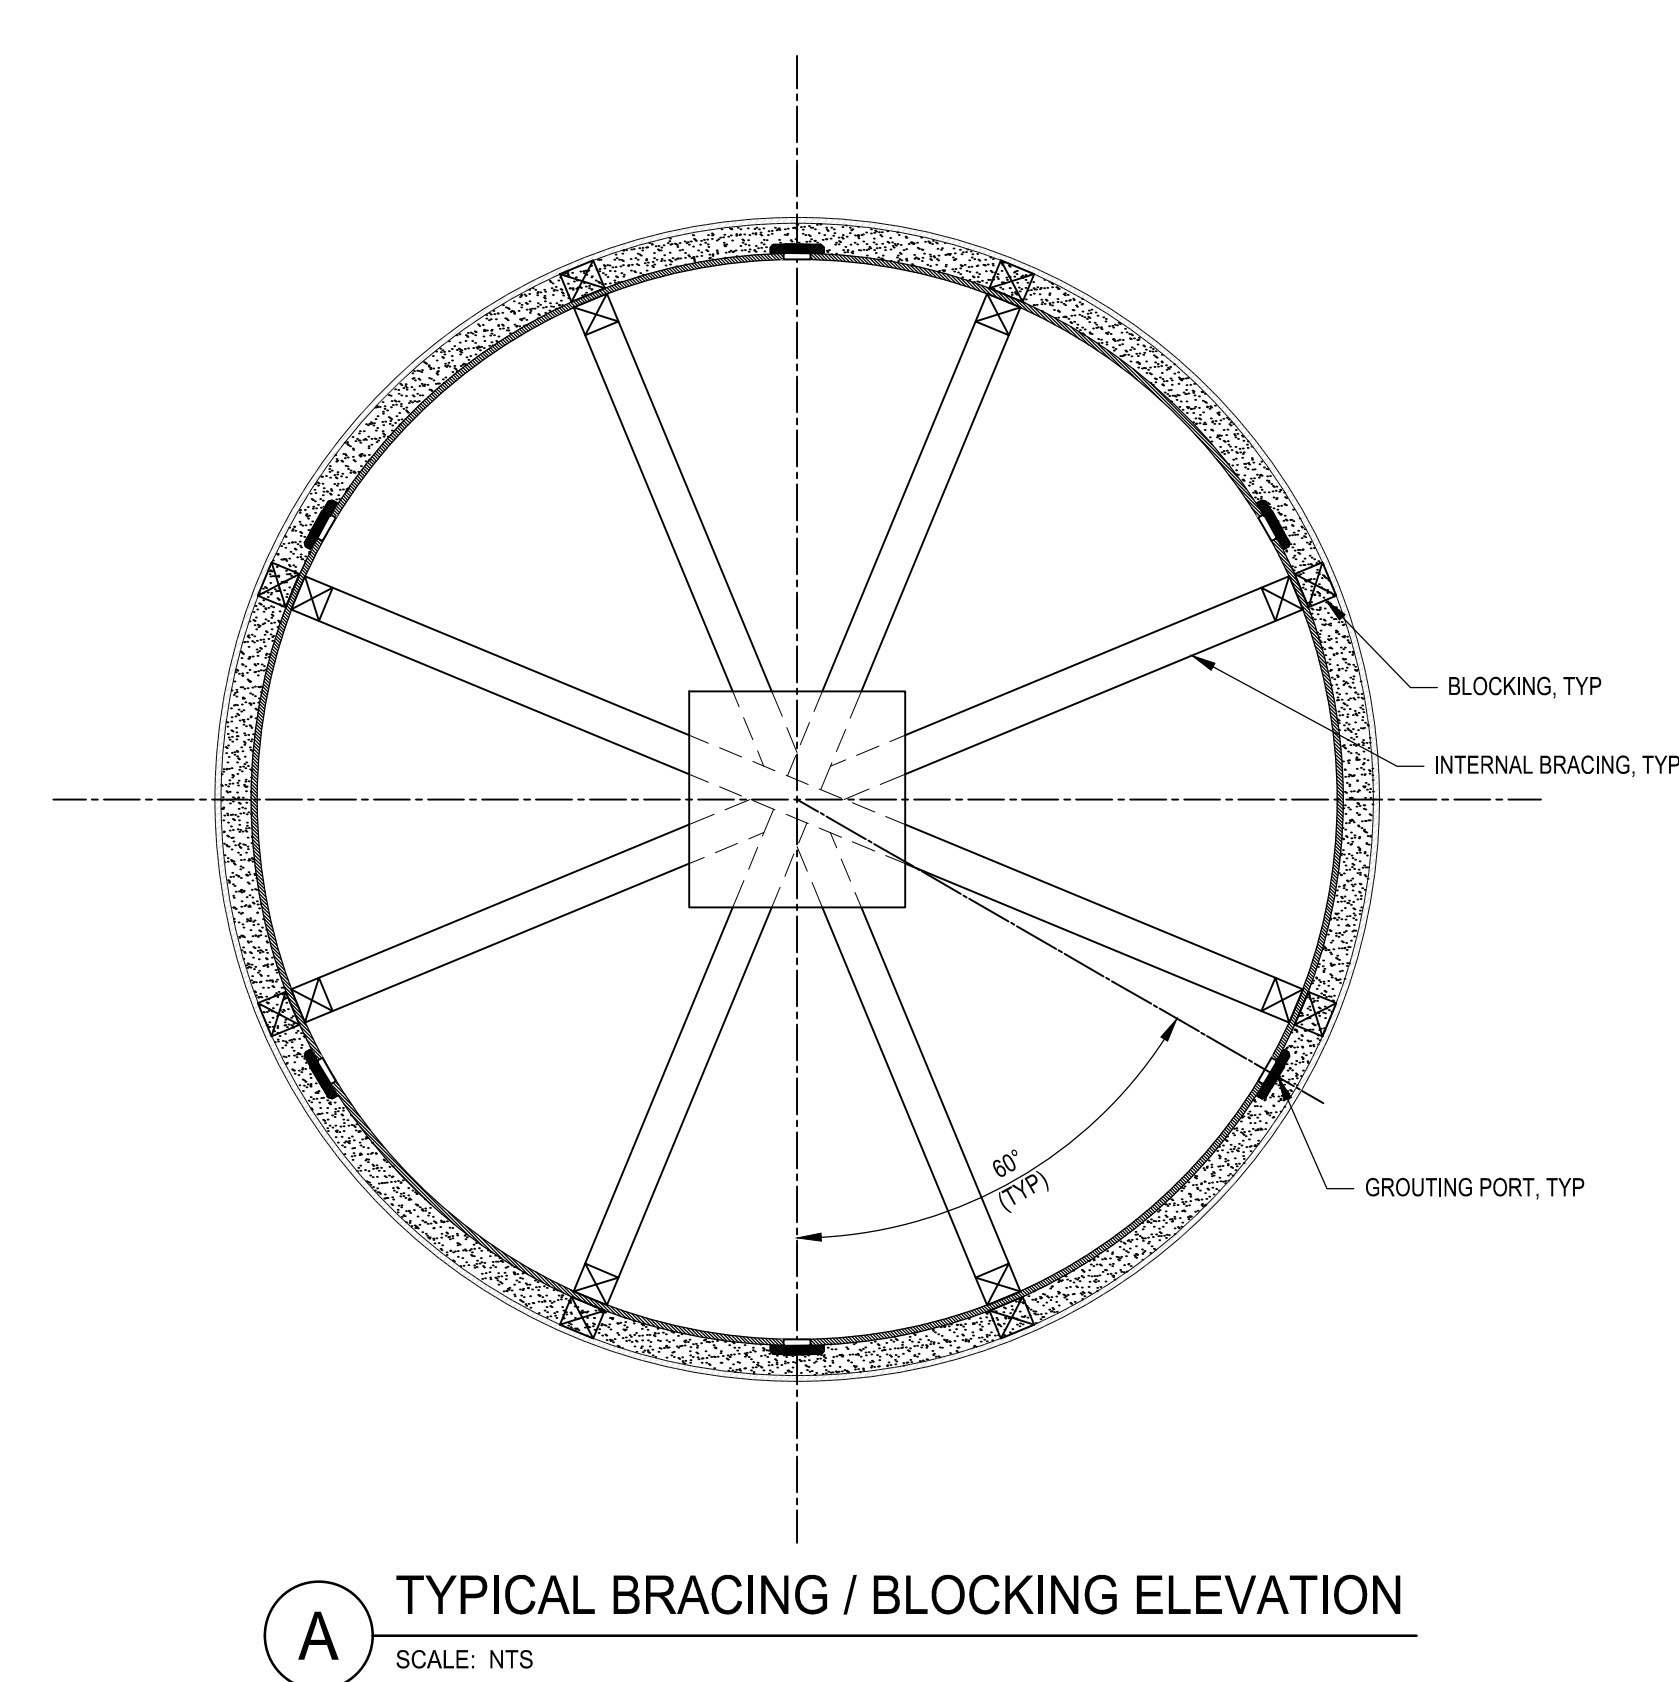

-

	A	B	C	D	E	F	G	H	I	J	K	L
1	OUTLET PIPE FLANGE SCHEDULE											
2	FLANGE	THICKNESS, 'THK' (INCHES)	OD (INCHES)	ID (TABLE NOTE 1)		FACE ANGLE W/ PIPE AXIS, α (DEGREES)	BC (INCHES)	BOLT HOLE DIA, 'DH' (INCHES)	BOLT DIA, 'DB' (INCHES)	NO. OF BOLTS, 'N'	BOLT OFFSET TO FLANGE AXIS, β (DEGREES)	REMARKS
3				MAJOR (INCHES)	MINOR (INCHES)							
4	A	2 1/4	--	97.02	96	98.297	106.5	1 5/8	1 1/2	60	3	EXISTING CAST IRON FLANGE, FV DIMENSIONS
5	B	2 1/4	113.25	98.03	97	98.297	106.5	1 5/8	1 1/2	60	3	MATCH EXISTING FLANGE 'A' ARRANGEMENT
6	C	2 1/4	106.5	91	91	90	102	2 3/8	2 1/4	68	0	MATCH APPROVED VALVE DETAILS
7	D	2 1/4	106.5	91	91	90	102	2 3/8	2 1/4	68	0	MATCH APPROVED VALVE DETAILS
8	NOTES: 1. INSIDE DIAMETERS LISTED FOR STEEL FLANGES MATCH THE THEORETICAL OUTSIDE DIAMETER OF THE PIPE. ADJUST ACTUAL INSIDE DIAMETERS OF FLANGES TO ACCOUNT FOR FIT-UP CLEARANCES AND WELDING TOLERANCES.											

UNIFORM CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 UNIFORM CODE.

ENERGY CODE STATEMENT:

TO THE BEST OF THE REGISTERED DESIGN PROFESSIONAL'S KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGEMENT THESE PLANS AND/OR SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2025 ENERGY CODE.

WARNING:

THE ALTERATION OF THIS MATERIAL IN ANY WAY, UNLESS DONE UNDER THE DIRECTION OF A COMPARABLE PROFESSIONAL, I.E. ARCHITECT FOR AN ARCHITECT, ENGINEER FOR AN ENGINEER OR LANDSCAPE ARCHITECT FOR A LANDSCAPE ARCHITECT, IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND/OR REGULATIONS AND IS A CLASS 'A' MISDEMEANOR.



CONTRACT:	CONSTRUCTION
TITLE:	PROVIDE FOUNDATION REMEDATION AND CONCRETE REPAIR CONKLINGVILLE DAM NYS DAM ID #205-0415
LOCATION:	233 COUNTY ROUTE 8 HADLEY, NY SARATOGA COUNTY
CLIENT:	NYS DEPARTMENT OF ENVIRONMENTAL CONSERVATION

BID DOCUMENTS

1	09/04/2026	ADDENDUM #6
0	06/22/2026	BID DOCUMENTS
MARK	DATE	DESCRIPTION
PROJECT NUMBER:	47164-C	
DESIGNED BY:	RCP	
DRAWN BY:	MDI	
FIELD CHECK:	-	
APPROVED:	JMR	
SHEET TITLE:		

METALS
96" DIA. TO 90" DIA.
PIPE REDUCER

DRAWING NUMBER: S-793